

Universe Parameters

Definition

Name: *Volunteer Management*
 Description: *Volunteer Management*
 Connection: *Personify711*

General information

Created: *4/10/2008 by Administrator*
 Modified: *10/31/2008 by Administrator*
 Comments:

Statistics: *38 Classes*
464 Objects
26 Tables
72 Aliases
97 Joins
0 Contexts
5 Hierarchies
25 Conditions

Strategies

Join strategy: *Edit Manually (none)*
 Table strategy: *(Built-in) Standard*
 Object strategy: *(Built-in) Standard Renaming*

Controls

Limit size of result set to: *5000 rows*
 Limit size of long text objects to: *1000 characters*
 Limit execution time to: *10 minutes*
 Warn if cost estimate exceeds: *unchecked*

SQL parameters

Query
 Allow use of subqueries: *yes*
 Allow use of union, intersect and minus operators: *yes*
 Allow complex conditions in Query Panel: *yes*
 Cartesian products: *warn*
 Multiple paths
 Generate several SQL statements for each context: *yes*
 Generate several SQL statements for each measure: *yes*
 Allow selection of multiple contexts: *no*

Links

No links for this universe

Object List

No classes

Object Properties

Class:

Description:

Name Info

This class contains the name components for a volunteer.

Object:

Type:

Description:

Select equivalent:

Where equivalent:

Label Name

Character

This is the label name of the volunteer.

CUSTOMER_VOLUNTEER.LABEL_NAME

Qualification:

dimension

List of values:

no

Security access level:

0

Can be used:

in result, in condition, in sort

Object status:

show

Object:

Type:

Description:

Select equivalent:

Where equivalent:

Last First Name

Character

This is the concatenation of the last name and first name of the volunteer.

CUSTOMER_VOLUNTEER.LAST_FIRST_NAME

Qualification:

dimension

List of values:

no

Security access level:

0

Can be used:

in result, in condition, in sort

Object status:

show

Object:

Type:

Description:

Select equivalent:

Where equivalent:

Last Name

Character

This is the last name of the volunteer.

CUSTOMER_VOLUNTEER.LAST_NAME

Qualification:

dimension

List of values:

no

Security access level:

0

Can be used:

in result, in condition, in sort

Object status:

show

Object: **First Name**
Type: Character
Description: This is the first name of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.FIRST_NAME
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Name Prefix**
Type: Character
Description: This is the name prefix of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.NAME_PREFIX
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Suffix**
Type: Character
Description: This is the name suffix of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.NAME_SUFFIX
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Professional Credentials**
Type: Character
Description: These are the professional credentials of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.NAME_CREDENTIALS
Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Primary Address
Description:	This class contains the primary address components for a volunteer.

Object: **Address Line 1**
 Type: Character
 Description: This is the address line 1 of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_VOLUNTEER.ADDRESS_1
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Address Line 2**
 Type: Character
 Description: This is the address line 2 of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_VOLUNTEER.ADDRESS_2
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Address Line 3**
 Type: Character
 Description: This is the address line 3 of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_VOLUNTEER.ADDRESS_3
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Address Line 4**
Type: Character
Description: This is the address line 4 of the volunteer's primary address.
Select equivalent: CUS_ADDRESS_VOLUNTEER.ADDRESS_4
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **City**
Type: Character
Description: This is the city of the volunteer's primary address.
Select equivalent: CUS_ADDRESS_VOLUNTEER.CITY
Where equivalent:

Qualification: dimension
List of values: 0m5, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **State**
Type: Character
Description: This is the state of the volunteer's primary address.
Select equivalent: CUS_ADDRESS_VOLUNTEER.STATE
Where equivalent:

Qualification: dimension
List of values: 0m6, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Postal code**
Type: Character
Description: This is the zip of the volunteer's primary address.
Select equivalent: CUS_ADDRESS_VOLUNTEER.POSTAL_CODE

Where equivalent:

Qualification: dimension
 List of values: 0m7, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Country Code**
 Type: Character
 Description: This is the country code of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_VOLUNTEER.COUNTRY_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0m8, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Country Description**
 Type: Character
 Description: This is the description of the country of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_VOLUNTEER.COUNTRY_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Address Type Code**
 Type: Character
 Description: This is the address type code of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_DETAIL_VOLUNTEER.ADDRESS_TYPE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0m0, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Full Address**
 Type: Character
 Description: This is the full address of the volunteer's primary address.
 Select equivalent: CUS_ADDRESS_DETAIL_VOLUNTEER.FORMATTED_DETAIL + CUS_ADDRESS_VOLUNTEER.FORMATTED_ADDRESS
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: Communication Info
Description: This class includes volunteer's communication info i.e. phone, fax, email, url etc.

Object: **Home Phone**
 Type: Character
 Description: This is the volunteer's home phone number.
 Select equivalent: CUSTOMER_VOLUNTEER.HOME_PHONE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Work Phone**
 Type: Character
 Description: This is the volunteer's work phone number.
 Select equivalent: CUSTOMER_VOLUNTEER.WORK_PHONE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Phone**
Type: Character
Description: This is the volunteer's primary phone number.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_PHONE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Fax**
Type: Character
Description: This is the volunteer's primary fax number.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_FAX
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Email Address**
Type: Character
Description: This is the volunteer's primary email address.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_EMAIL_ADDRESS
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary URL**
Type: Character
Description: This is the volunteer's primary URL.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_URL
Where equivalent:

Qualification: dimension

List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Phone Location Code**
Type: Character
Description: This is the volunteer's primary phone location.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_PHONE_LOCATION_CODE
Where equivalent:

Qualification: dimension
List of values: 0v2, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Email Location Code**
Type: Character
Description: This is the volunteer's primary email location.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_EMAIL_LOCATION_CODE
Where equivalent:

Qualification: dimension
List of values: 0v3, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Fax Location Code**
Type: Character
Description: This is the volunteer's primary fax location.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_FAX_LOCATION_CODE
Where equivalent:

Qualification: dimension
List of values: 0v4, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Preferred Communication Method**

Type: Character
 Description: This is the volunteer's preferred communication method.
 Select equivalent: CUSTOMER_VOLUNTEER.PREFERRED_COMM_METHOD_CODE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: **Communication Rules**
 Description: This class contains the communication/solicitation rules for the volunteer.

Object: **Allow Phone?**
 Type: Character
 Description: This indicates if the volunteer allows solicitation phone calls.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_PHONE_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Allow Email?**
 Type: Character
 Description: This indicates if the volunteer allows solicitation emails.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_EMAIL_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Allow Fax?**
 Type: Character
 Description: This indicates if the volunteer allows solicitation faxes.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_FAX_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Allow Label Sales?**
 Type: Character
 Description: This indicates if the volunteer allows selling of their names.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_LABEL_SALES_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Allow Solicitation?**
 Type: Character
 Description: This indicates if the volunteer allows any solicitation at all.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_SOLICITATION_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Allow Internal Mail?**
 Type: Character
 Description: This indicates if the volunteer can be sent any internal marketing communication.
 Select equivalent: CUSTOMER_VOLUNTEER.ALLOW_INTERNAL_MAIL_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Publish Primary Phone?**
Type: Character
Description: This indicates if the volunteer allows to publish their primary phone number.
Select equivalent: CUSTOMER_VOLUNTEER.PUBLISH_PRIMARY_PHONE_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Publish Primary Email?**
Type: Character
Description: This indicates if the volunteer allows to publish their primary email address.
Select equivalent: CUSTOMER_VOLUNTEER.PUBLISH_PRIMARY_EMAIL_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Publish Primary Fax?**
Type: Character
Description: This indicates if the volunteer allows to publish their primary fax number.
Select equivalent: CUSTOMER_VOLUNTEER.PUBLISH_PRIMARY_FAX_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Publish Home Phone?**
Type: Character
Description: This indicates if the volunteer allows to publish their primary home number.
Select equivalent: CUSTOMER_VOLUNTEER.PUBLISH_HOME_PHONE_FLAG
Where equivalent:

Qualification: dimension

List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Publish Work Phone?**
 Type: Character
 Description: This indicates if the volunteer allows to publish their work phone number.
 Select equivalent: CUSTOMER_VOLUNTEER.PUBLISH_WORK_PHONE_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: **Volunteer Qualification Activity**

Description: Identifies the qualification s for a volunteer. Most organizations have prerequisite requirements, such as requiring that a volunteer application be submitted, requiring that waivers and proof of insurance be submitted , requiring that volunteers participate in orientation training, etc. Some organizations require specific certifications. Other organizations want to track training that volunteers have completed. Some of these qualification requirements are minimum requirements to be approved as a volunteer; others are advanced requirements that qualify the volunteer for a higher level.

Object: **Qualification Activity Code**
 Type: Character

Description: Qualification Activity Code provides a way to categorize the type of qualification activity.

Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_ACTIVITY_CODE

Where equivalent:

Qualification: dimension

List of values: 00k, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Qualification Activity Description**

Type: Character

Description: Describes the qualification activity.

Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_ACTIVITY_DESCR

Where equivalent:

Qualification: dimension

List of values: 00m, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Qualification Activity Subcode**

Type: Character

Description: Defines the sub categories of the qualification activity.

Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_ACTIVITY_SUBCODE

Where equivalent:

Qualification: dimension

List of values: 00l, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Qualification Activity Subcode Description**

Type: Character

Description: Describes the sub category of the qualification activity.

Select equivalent: APP_SUBCODE_QUALIFICATION_ACTIVITY.DESCR

Where equivalent:

Qualification: dimension
 List of values: 1f2, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Activity Date**
 Type: Date
 Description: Effective date when the qualification activity was completed.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_ACTIVITY_DATE
 Where equivalent:

Qualification: dimension
 List of values: 00n, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Type Code**
 Type: Character
 Description: Code that describes the type of qualification requirement, such as: PREREQUISITE, MAINTENANCE, TRAINING, CERTIFICATION. This is a system code but users can define additional codes. 'CERTIFICATION' is required to exist to integrate Volunteer Management and Certification.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_TYPE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 006, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Type Description**
 Type: Character
 Description: Describes the qualification activity type.

Select equivalent: APP_CODE_QUALIFICATION_TYPE.DESCR
Where equivalent:

Qualification: dimension
List of values: 0vv, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Qualification Type Sub Code**
Type: Character
Description: Further categorization of the Qualification type within the qualification type code
Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_TYPE_SUB_CODE
Where equivalent:

Qualification: dimension
List of values: 007, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Qualification Type Subcode Description**
Type: Character
Description: Description of the qualification type subcode.
Select equivalent: APP_SUBCODE_QUALIFICATION_TYPE.DESCR
Where equivalent:

Qualification: dimension
List of values: 0vw, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Qualification Level Code**
Type: Character
Description: Identifies if the activity has a level classification, such as ADVANCED.
Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_LEVEL_CODE
Where equivalent:

Qualification: dimension
List of values: 008, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort

Object status: show

Object: **Qualification Level Description**
 Type: Character
 Description: Description of the qualification level.
 Select equivalent: APP_CODE_QUALIFICATION_LEVEL.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1e8, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Status Code**
 Type: Character
 Description: Identifies whether an activity is permanent or whether the volunteer must renew/repeat. Valid values are PENDING, ACTIVE and EXPIRED.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIFICATION_STATUS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 009, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Status Description**
 Type: Character
 Description: Describes the qualification status.
 Select equivalent: APP_CODE_QUALIFICATION_STATUS.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 0vx, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Qualification Status Date**
Type: Date
Description: The date when the qualification is updated.
Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.QUALIF_STATUS_DATE
Where equivalent:

Qualification: dimension
List of values: 00a, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Creation Source Code**
Type: Character
Description: Identifies how the record was created. If the record is created manually by the user, the system sets the field to "VOL". If the system creates a qualification activity record from a customer certification, this is set to 'CRT'.
Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.CREATION_SOURCE_CODE
Where equivalent:

Qualification: dimension
List of values: 00e, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Assigned To User ID**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.ASSIGNED_TO_USER_ID
Where equivalent:

Qualification: dimension
List of values: 00o, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort

Object status: show

Object: **Effective Date**
 Type: Date
 Description: The effective date of the qualification activity.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.EFFECTIVE_DATE
 Where equivalent:

Qualification: dimension
 List of values: 00b, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **End Date**
 Type: Date
 Description: The end date of the qualification activity.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.END_DATE
 Where equivalent:

Qualification: dimension
 List of values: 00c, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Comments**
 Type: Character
 Description: Comments related to the qualification activity.
 Select equivalent: CUS_VOLUNTEER_QUALIF_ACTIVITY.COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: 00d, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Application Info
Description:	Organizations usually ask volunteers to fill out an application. This class contains information related to th

e application.

Object: **Interview Date**
 Type: Date
 Description: The date the volunteer was interviewed.
 Select equivalent: CUS_VOLUNTEER.INTERVIEW_DATE
 Where equivalent:

Qualification: dimension
 List of values: 115, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Application Date**
 Type: Date
 Description: Date the application was submitted.
 Select equivalent: CUS_VOLUNTEER.APPLICATION_DATE
 Where equivalent:

Qualification: dimension
 List of values: 116, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Type Code**
 Type: Character
 Description: User-defined. Suggested use is to use this to identify whether the volunteer is a staff person, an individual (who is not staff) or company.
 Select equivalent: CUS_VOLUNTEER.VOLUNTEER_TYPE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 117, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Type Description**
 Type: Character
 Description: Description of the volunteer's type.
 Select equivalent: APP_CODE_VOLUNTEER_TYPE.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12p, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Class Code**
 Type: Character
 Description: Optional field that allows an organization to categorize its volunteers.
 Select equivalent: CUS_VOLUNTEER.VOLUNTEER_CLASS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 118, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Class Description**
 Type: Character
 Description: Describes the volunteer's class.
 Select equivalent: APP_CODE_VOLUNTEER_CLASS.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12q, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Reason Code**
 Type: Character
 Description: Code that best identifies the reason the volunteer gave for wanting to volunteer.
 Select equivalent: CUS_VOLUNTEER.VOLUNTEER_REASON_CODE
 Where equivalent:

Qualification: dimension

List of values: 119, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Reason Description**
 Type: Character
 Description: Describes the volunteer's reason to volunteer.
 Select equivalent: APP_CODE_VOLUNTEER_REASON.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12r, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Security Level Code**
 Type: Character
 Description: Optional field that identifies the level of security background check undergone and passed by the volunteer. Typically needed for organizations using volunteers for events where children are attending.
 Select equivalent: CUS_VOLUNTEER.SECURITY_LEVEL_CODE
 Where equivalent:

Qualification: dimension
 List of values: 11a, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Security Level Description**
 Type: Character
 Description: Describes the volunteer's security level.
 Select equivalent: APP_CODE_SECURITY_LEVEL.DESCR
 Where equivalent:

Qualification: dimension

List of values: 12s, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Level Code**
 Type: Character
 Description: Optional field that allows an organization to assign levels to volunteers based on experience, training, or any other criterion.
 Select equivalent: CUS_VOLUNTEER.VOLUNTEER_LEVEL_CODE
 Where equivalent:

Qualification: dimension
 List of values: 11b, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Level Description**
 Type: Character
 Description: Describes the volunteer level.
 Select equivalent: APP_CODE_VOLUNTEER_LEVEL.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12t, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Level Date**
 Type: Date
 Description: Date when the volunteer level was assigned.
 Select equivalent: CUS_VOLUNTEER.VOLUNTEER_LEVEL_DATE
 Where equivalent:

Qualification: dimension
 List of values: 11c, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Volunteer Status Code**
Type: Character
Description: This is a fixed system field. Valid values are: PE
ENDING, ACTIVE, INACTIVE,
SUSPENDED, EXPELLED.
Select equivalent: CUS_VOLUNTEER.VOLUNTEER_STATUS_CODE
Where equivalent:

Qualification: dimension
List of values: 11d, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Status Description**
Type: Character
Description: Describes the volunteer status.
Select equivalent: APP_CODE_VOLUNTEER_STATUS.DESCR
Where equivalent:

Qualification: dimension
List of values: 12u, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Status Date**
Type: Date
Description: Date when the volunteer status was last changed.
Select equivalent: CUS_VOLUNTEER.VOLUNTEER_STATUS_DATE
Where equivalent:

Qualification: dimension
List of values: 11e, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Termination Reason Code**

Type: Character
 Description: Code identifying the volunteer's termination reason.
 Select equivalent: CUS_VOLUNTEER.TERMINATION_REASON_CODE
 Where equivalent:

Qualification: dimension
 List of values: 11f, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Termination Reason Description**
 Type: Character
 Description: Describes the volunteer termination reason.
 Select equivalent: APP_CODE_TERMINATION_REASON.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12v, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Best Call Time Code**
 Type: Character
 Description: User-defined code that identifies the best time to reach a volunteer by phone. Examples include: WEE, KDAY_AM, WEEKEND_AM, SAT_ONLY_AM, etc.
 Select equivalent: CUS_VOLUNTEER.BEST_CALL_TIME_CODE
 Where equivalent:

Qualification: dimension
 List of values: 11g, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Best Call Time Description**
 Type: Character
 Description: Describes the best call time codes.

Select equivalent: APP_CODE_BEST_CALLTIME.DESCR
Where equivalent:

Qualification: dimension
List of values: 12w, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Experience Code**

Type: Character

Description: User-defined field that captures the organization's evaluation of the level of experience the customer has had volunteering. It is expected that the organization will occasionally update this field.

Select equivalent: CUS_VOLUNTEER.VOLUNTEER_EXPERIENCE_CODE
Where equivalent:

Qualification: dimension
List of values: 11h, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Experience Description**

Type: Character

Description: Describes the volunteer's experience.

Select equivalent: APP_CODE_VOLUNTEER_EXPERIENCE.DESCR
Where equivalent:

Qualification: dimension
List of values: 12x, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Experience Update Date**

Type: Date

Description: Date when the volunteer experience was last updated.

Select equivalent: CUS_VOLUNTEER.EXPERIENCE_UPDATE_DATE
 Where equivalent:

Qualification: dimension
 List of values: 11i, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Availability Code**
 Type: Character
 Description: Code that identifies a volunteer's general availability. Examples include: WEEKEND_ONLY, SAT_ONLY, WEEKDAY_ONLY. It can also be used to quantify a volunteer's availability, such as LOW, MEDIUM, HIGH.

Select equivalent: CUS_VOLUNTEER.VOLUNTEER_AVAILABILITY_CODE
 Where equivalent:

Qualification: dimension
 List of values: 11j, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Availability Description**
 Type: Character
 Description: Describes the Volunteer's availability.
 Select equivalent: APP_CODE_VOL_AVAILABILITY.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 12y, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Availability**
 Type: Character
 Description: Identifies a volunteers Av

Select equivalent:

availability over the entire week both AM and PM in the format "Mo-AM,Mo-PM,Tu-AM,Tu-PM,We-AM,We-PM,Th-AM,Th-PM,Fr-AM,Fr-PM,Sa-AM,Sa-PM,Su-AM,Su-PM".

```
CASE WHEN CUS_VOLUNTEER.AVAILABLE_MONDAY_AM_FLAG = 'Y' THEN 'Mo-AM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_MONDAY_PM_FLAG = 'Y' THEN 'Mo-PM' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_TUESDAY_AM_FLAG = 'Y' THEN 'Tu-AM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_TUESDAY_PM_FLAG = 'Y' THEN 'Tu-PM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_AM_FLAG = 'Y' THEN 'We-AM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_PM_FLAG = 'Y' THEN 'We-PM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_THURSDAY_AM_FLAG = 'Y' THEN 'Th-AM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_THURSDAY_PM_FLAG = 'Y' THEN 'Th-PM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_FRIDAY_AM_FLAG = 'Y' THEN 'Fr-AM,' ELSE "" END +
CASE WHEN CUS_VOLUNTEER.AVAILABLE_FRIDAY_PM_FLAG = 'Y' THEN 'Fr-PM,' ELSE "" END +
```

```

CASE WHEN CUS_VOLUNTEER.
AVAILABLE_SATURDAY_AM_FL
AG = 'Y' THEN 'Sa-AM,' EL
SE " END +
CASE WHEN CUS_VOLUNTEER.
AVAILABLE_SATURDAY_PM_FL
AG = 'Y' THEN 'Sa-PM,' EL
SE " END +
CASE WHEN CUS_VOLUNTEER.
AVAILABLE_SUNDAY_AM_FL
G = 'Y' THEN 'Su-AM,' ELS
E " END +
CASE WHEN CUS_VOLUNTEER.
AVAILABLE_SUNDAY_PM_FLAG
= 'Y' THEN 'Su-PM' ELSE '
' END

```

Where equivalent:

Qualification: dimension
List of values: 1h, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Monday AM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Monday AM, in the
Select equivalent: CUS_VOLUNTEER.AVAILABLE_MONDAY_AM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11k, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Monday PM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Monday PM, in the evening.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_MONDAY_PM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11l, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Tuesday AM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Tuesday AM, in the morning.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_TUESDAY_AM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11m, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Tuesday PM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Tuesday PM, in the evening.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_TUESDAY_PM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11n, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Wednesday AM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Wednesday AM, in the morning.

Select equivalent: CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_AM_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 11o, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Available Wednesday PM?**
 Type: Character
 Description: Identifies whether the volunteer is specifically available on Wednesday PM, in the evening.

Select equivalent: CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_PM_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 11p, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Available Thursday AM?**
 Type: Character
 Description: Identifies whether the volunteer is specifically available on Thursday AM, in the morning.

Select equivalent: CUS_VOLUNTEER.AVAILABLE_THURSDAY_AM_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 11q, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Available Thursday PM?**
 Type: Character
 Description: Identifies whether the volunteer is specifically available

Select equivalent: ilable on Thursday PM, in
 the evening.
 Where equivalent: CUS_VOLUNTEER.AVAILABLE_THURSDAY_PM_FLAG

 Qualification: dimension
 List of values: 11r, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Available Friday AM?
Type: Character
Description: Identifies whether the volunteer is specifically available on Friday AM, in the m
Select equivalent: CUS_VOLUNTEER.AVAILABLE_FRIDAY_AM_FLAG
Where equivalent:

Qualification: dimension
 List of values: 11s, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Available Friday PM?
Type: Character
Description: Identifies whether the volunteer is specifically available on Friday PM, in the e
Select equivalent: CUS_VOLUNTEER.AVAILABLE_FRIDAY_PM_FLAG
Where equivalent:

Qualification: dimension
 List of values: 11t, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Available Saturday AM?
Type: Character
Description: Identifies whether the vol
 unteer is specifically ava
 ilable on Saturday AM, in
 the morning.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_SATURDAY_AM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11u, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Saturday PM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Saturday PM, in the evening.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_SATURDAY_PM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11v, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Sunday AM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Sunday AM, in the morning.
Select equivalent: CUS_VOLUNTEER.AVAILABLE_SUNDAY_AM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11w, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Available Sunday PM?**
Type: Character
Description: Identifies whether the volunteer is specifically available on Sunday PM, in the evening.

Select equivalent: CUS_VOLUNTEER.AVAILABLE_SUNDAY_PM_FLAG
Where equivalent:

Qualification: dimension
List of values: 11x, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Recruited By ID**
Type: Character
Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.
Select equivalent: CASE WHEN CUS_VOLUNTEER.RECRUITED_BY_SUB_CUST_ID = 0 THEN CUS_VOLUNTEER.RECRUITED_BY_MAST_CUST_ID ELSE CUS_VOLUNTEER.RECRUITED_BY_MAST_CUST_ID + '-' + Convert(char, CUS_VOLUNTEER.RECRUITED_BY_SUB_CUST_ID) END

Where equivalent:

Qualification: dimension
List of values: 12n, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Recruited By Master Customer ID**
Type: Character
Description: The master customer ID of the person who recruited the volunteer.
Select equivalent: CUS_VOLUNTEER.RECRUITED_BY_MAST_CUST_ID
Where equivalent:

Qualification: dimension
List of values: 11y, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort

Object status: show

Object: **Recruited By Sub Customer ID**
Type: Number
Description: The sub customer ID of the person who recruited the volunteer.
Select equivalent: CUS_VOLUNTEER.RECRUITED_BY_SUB_CUST_ID
Where equivalent:

Qualification: dimension
List of values: 120, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Recruited By Name**
Type: Character
Description: The name of the person who recruited the volunteer.
Select equivalent: CUSTOMER_RECRUITED_BY.LABEL_NAME
Where equivalent:

Qualification: dimension
List of values: 1e9, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Drivers License State Code**
Type: Character
Description: The state in which the volunteer has a driver's license.
Select equivalent: CUS_VOLUNTEER.DRIVERS_LICENSE_STATE_CODE
Where equivalent:

Qualification: dimension
List of values: 121, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Drivers License Expiration Date**
Type: Date
Description: The expiration date of the volunteer's driver's license.
Select equivalent: CUS_VOLUNTEER.DRIVERS_LICENSE_EXPIRATION_DATE

Where equivalent:

Qualification: dimension
 List of values: 122, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Drivers License No**
 Type: Character
 Description: The volunteer's driver's license number.
 Select equivalent: CUS_VOLUNTEER.DRIVERS_LICENSE_NO
 Where equivalent:

Qualification: dimension
 List of values: 123, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Preferred Volunteer Location**
 Type: Character
 Description: Text field that allows the user to specify the location where the volunteer would prefer to be assigned.
 Select equivalent: CUS_VOLUNTEER.PREFERRED_VOLUNTEER_LOCATION
 Where equivalent:

Qualification: dimension
 List of values: 124, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Location Not Preferred**
 Type: Character
 Description: Text field that allows the user to specify the location where the volunteer does not want to be assigned.

Select equivalent: CUS_VOLUNTEER.LOCATION_NOT_PREFERRED
Where equivalent:

Qualification: dimension
List of values: 125, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Since**
Type: Date
Description: The day the volunteer became active.
Select equivalent: CUS_VOLUNTEER.VOLUNTEER_INITIAL_BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: 126, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Hours Update Date**
Type: Date
Description: Date when the volunteer's hours were updated.
Select equivalent: CUS_VOLUNTEER.VOLUNTEER_HOURS_UPDATE_DATE
Where equivalent:

Qualification: dimension
List of values: 129, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Last Volunteer Date**
Type: Date
Description: Date when the volunteer last volunteered.
Select equivalent: CUS_VOLUNTEER.LAST_VOLUNTEER_DATE
Where equivalent:

Qualification: dimension
List of values: 12a, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort

Object status: show

Object: **Highest Annual Recognition Code(Future)**

Type: Character

Description:

Select equivalent: CUS_VOLUNTEER.HIGHEST_ANNUAL_RECOGNITION_CODE

Where equivalent:

Qualification: dimension

List of values: 12b, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Annual Recognition Award Date (Future)**

Type: Date

Description:

Select equivalent: CUS_VOLUNTEER.ANNUAL_RECOGNITION_AWARD_DATE

Where equivalent:

Qualification: dimension

List of values: 12c, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Highest Lifetime Recognition Code(Future)**

Type: Character

Description:

Select equivalent: CUS_VOLUNTEER.HIGHEST_LIFETIME_RECOGNITION_CODE

Where equivalent:

Qualification: dimension

List of values: 12d, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Lifetime Recognition Award Date(Future)**

Type: Date
Description:

Select equivalent: CUS_VOLUNTEER.LIFETIME_RECOGNITION_AWARD_DATE
Where equivalent:

Qualification: dimension
List of values: 12e, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Creation Source Code(Future)**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER.CREATION_SOURCE_CODE
Where equivalent:

Qualification: dimension
List of values: 12f, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Permission Level Code(Future)**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER.PERMISSION_LEVEL_CODE
Where equivalent:

Qualification: dimension
List of values: 12g, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Comments**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER.COMMENTS

Where equivalent:

Qualification: dimension
 List of values: 12h, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Lifetime Volunteer Hours**
 Type: Number
 Description: Hours volunteered to date.
 Select equivalent: CUS_VOLUNTEER.LIFETIME_VOLUNTEER_HOURS
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 127, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Annual Volunteer Hours**
 Type: Number
 Description: Hours volunteered in the current year.
 Select equivalent: CUS_VOLUNTEER.ANNUAL_VOLUNTEER_HOURS
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 128, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Skills & Interests
Description:	Class contains information about the volunteer's interests and skills.

No objects

Class:	Volunteer Skills
Description:	An organization often chooses a volunteer based on the volunteer's skills and/or interests. Class contains in

formation about volunteer's skills.

Object: **Skill Code**
 Type: Character
 Description: Code that describes the volunteer's skill
 Select equivalent: CUS_VOLUNTEER_SKILL.SKILL_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0w1, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Skill Description**
 Type: Character
 Description: Describes the skill code.
 Select equivalent: APP_CODE_SKILL.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 0wc, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Skill Level Code**
 Type: Character
 Description: Code that identifies the volunteer's skill level, such as "BEGINNER", "INTERMEDIATE", "ADVANCED".
 Select equivalent: CUS_VOLUNTEER_SKILL.SKILL_LEVEL_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0w2, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Skill Level Description**

Type:	Character
Description:	Describes the skill level code.
Select equivalent:	APP_CODE_SKILL_LEVEL.DESCR
Where equivalent:	
Qualification:	dimension
List of values:	0wd, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object: Evaluated By ID(Future)

Type:	Character
Description:	This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.
Select equivalent:	CASE WHEN CUS_VOLUNTEER.RECRUITED_BY_SUB_CUST_ID = 0 THEN CUS_VOLUNTEER.RECRUITED_BY_MAST_CUST_ID ELSE CUS_VOLUNTEER.RECRUITED_BY_MAST_CUST_ID + '-' + Convert(char, CUS_VOLUNTEER.RECRUITED_BY_SUB_CUST_ID) END
Where equivalent:	
Qualification:	dimension
List of values:	1ea, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object: Evaluated By Master Customer ID(Future)

Type:	Character
Description:	
Select equivalent:	CUS_VOLUNTEER_SKILL.EVALUATED_BY_MAST_CUST_ID
Where equivalent:	
Qualification:	dimension

List of values: 0w4, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Evaluated By Sub Customer ID(Future)**
 Type: Number
 Description:

Select equivalent: CUS_VOLUNTEER_SKILL.EVALUATED_BY_SUB_CUST_ID
 Where equivalent:

Qualification: dimension
 List of values: 0w5, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Evaluated By Name(Future)**
 Type: Character
 Description:

Select equivalent: CUSTOMER_EVALUATED_BY.LABEL_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1eb, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Comments**
 Type: Character
 Description: Comments associated with the Skill.
 Select equivalent: CUS_VOLUNTEER_SKILL.COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: 0w6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Interests
Description:	An organization often chooses a volunteer based on the volunteer's skills and/or interests. Class contains information about volunteer's interests.
Object:	Interest Category Code
Type:	Character
Description:	Code that describes the volunteer's interest area.
Select equivalent:	CUS_VOLUNTEER_INTEREST.INTEREST_CATEGORY_CODE
Where equivalent:	
Qualification:	dimension
List of values:	0wg, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Interest Category Description
Type:	Character
Description:	Describes the interest category.
Select equivalent:	APP_CODE_INTEREST_CATEGORY.DESCR
Where equivalent:	
Qualification:	dimension
List of values:	0wp, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Interest Category Subcode
Type:	Character
Description:	Subcategory code that further defines the volunteer's interest area.
Select equivalent:	CUS_VOLUNTEER_INTEREST.INTEREST_CATEGORY_SUBCODE
Where equivalent:	
Qualification:	dimension
List of values:	0wh, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object: **Interest Category Subcode Description**
 Type: Character
 Description: Describes the interest category subcode.
 Select equivalent: APP_SUBCODE_INTEREST_CATEGORY.DESCR
 Where equivalent:

Qualification: dimension
 List of values: Owq, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Comments**
 Type: Character
 Description: Comments related to volunteer's interests.
 Select equivalent: CUS_VOLUNTEER_INTEREST.COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: Owj, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: Volunteer Reference
Description: Class contains information about references provided by the volunteer.

Object: **Reference Customer ID**
 Type: Character
 Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.

Select equivalent: CASE WHEN CUS_VOLUNTEER_REFERENCE.REFERENCE_SUB_CUST_ID = 0 THEN CUS_VOLUNTEER_REFERENCE.REFERENCE_MAST_CUST_ID ELSE CUS_VOLUNTEER_REFERENCE.REFERENCE_MAST_CUST_ID + '-' + Convert(char, CUS_VOLUNTEER_REFERENCE.REFE

Where equivalent: RENCE_SUB_CUST_ID) END

Qualification: dimension

List of values: 1gq, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Reference Master Customer ID**

Type: Character

Description: Identifies the master customer id of the referee.

Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_MAST_CUST_ID

Where equivalent:

Qualification: dimension

List of values: 0yu, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Reference Sub Customer ID**

Type: Number

Description: Identifies the master customer id of the referee.

Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_SUB_CUST_ID

Where equivalent:

Qualification: dimension

List of values: 0yv, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Referee Name**

Type: Character

Description: Identifies the name of the referee.

Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_LABEL_NAME

Where equivalent:

Qualification: dimension

List of values: 0yw, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Referee Primary Phone**
Type: Character
Description: Identifies the primary phone no. of the referee.
Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_PRIMARY_PHONE
Where equivalent:

Qualification: dimension
List of values: 0yx, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Referee Primary Email Address**
Type: Character
Description: Identifies the email address of the referee.
Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_PRIMARY_EMAIL_ADDRESS
Where equivalent:

Qualification: dimension
List of values: 0yy, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Reference Received Date**
Type: Date
Description: Date the reference was received.
Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_RECEIVED_DATE
Where equivalent:

Qualification: dimension
List of values: 106, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Referee Contact Date**
Type: Date
Description: Date when the referee was actually contacted.
Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_CONTACT_DATE

Where equivalent:

Qualification: dimension
 List of values: 108, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Method Code**
 Type: Character
 Description: Identifies the method used for contacting the referee.
 Select equivalent: CUS_VOLUNTEER_REFERENCE.CONTACT_METHOD_CODE
 Where equivalent:

Qualification: dimension
 List of values: 107, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Method Description**
 Type: Character
 Description: Describes the method used for contacting the referee.
 Select equivalent: APP_CODE_REFREE_CONTACT_METHOD.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1fb, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Referee Status Code**
 Type: Character
 Description: Identifies the status of the referee.
 Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_STATUS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 109, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Referee Status Description**
Type: Character
Description: Describes the status of the referee.
Select equivalent: APP_CODE_REFERENCE_STATUS.DESCR
Where equivalent:

Qualification: dimension
List of values: 1fa, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Reference Status Date**
Type: Date
Description: Date when the reference was last changed.
Select equivalent: CUS_VOLUNTEER_REFERENCE.REFERENCE_STATUS_DATE
Where equivalent:

Qualification: dimension
List of values: 10a, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Assigned To User Id**
Type: Character
Description: Person assigned to check the reference.
Select equivalent: CUS_VOLUNTEER_REFERENCE.ASSIGNED_TO_USER_ID
Where equivalent:

Qualification: dimension
List of values: 10b, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Comments**
Type: Character
Description: Comments related to the reference.
Select equivalent: CUS_VOLUNTEER_REFERENCE.COMMENTS
Where equivalent:

Qualification: dimension
 List of values: 100, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Job Assignment & Job Hours Worked
Description:	Class contains information about the job assignments and hours worked for a volu

Object: **Event Code**
 Type: Character
 Description: Code of the event for which volunteer's are needed.
 Select equivalent: CUS_VOLUNTEER_JOB_HOURS_WORKED.EVENT_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1eh, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Subcode**
 Type: Character
 Description: Optional field that is being provided to accommodate Meetings and Committees that get created as volunteer events. For products, this is set to the product code.
 Select equivalent: CUS_VOLUNTEER_JOB_HOURS_WORKED.EVENT_SUBCODE
 Where equivalent:

Qualification: dimension
 List of values: 1ei, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Code**
 Type: Character
 Description: User defined volunteering job.
 Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.JOB_CODE

Where equivalent:

Qualification: dimension
 List of values: 0wv, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Start Date**
 Type: Date
 Description: Start date of the volunteer job.
 Select equivalent: CUS_VOLUNTEER_JOB_HOURS_WORKED.START_DATE
 Where equivalent:

Qualification: dimension
 List of values: 1em, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job End Date**
 Type: Date
 Description: End date of the volunteer job.
 Select equivalent: CUS_VOLUNTEER_JOB_HOURS_WORKED.END_DATE
 Where equivalent:

Qualification: dimension
 List of values: 1en, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Assignment Status Code**
 Type: Character
 Description: Identifies whether the volunteer has been assigned.
 Possible values are 'REQUESTED', 'ASSIGNED', 'CONFIRMED', 'DECLINED' etc..
 Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.ASSIGNMENT_STATUS_CODE
 Where equivalent:

Qualification: dimension

List of values: 0wy, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Assignment Status Description**
Type: Character
Description: Describes the assignment status.
Select equivalent: APP_CODE_ASSIGNMENT_STATUS.DESCR
Where equivalent:

Qualification: dimension
List of values: 1go, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Assignment Status Date**
Type: Date
Description: Date when the assignment status was last changed.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.ASSIGNMENT_STATUS_DATE
Where equivalent:

Qualification: dimension
List of values: 0x0, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Fulfilling Job Percentage(Obsolete)**
Type: Number
Description:
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.FULFILLING_JOB_PERCENTAGE
Where equivalent:

Qualification: dimension
List of values: 0x1, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Schedule Id (Future)**
Type: Number
Description:

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.JOB_SCHEDULE_ID
Where equivalent:

Qualification: dimension
List of values: 0x2, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Attendance Score Code(Patty need description)**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.ATTENDANCE_SCORE_CODE
Where equivalent:

Qualification: dimension
List of values: 0x4, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Performance Score Code (Future)**
Type: Character
Description:

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.JOB_PERFORMANCE_SCORE_CODE
Where equivalent:

Qualification: dimension
List of values: 0x5, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Evaluation Comments**
Type: Character
Description: Evaluation comments for the volunteer job.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.EVALUATION_COMMENTS

Where equivalent:

Qualification: dimension
 List of values: 0x6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Assignment Comments(Patty not in design)**
 Type: Character
 Description:

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.JOB_ASSIGNMENT_COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: 0x3, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Hours Worked Qty(Patty)**
 Type: Number
 Description:

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.JOB_HOURS_WORKED_QTY
 Where equivalent:

Qualification: dimension
 List of values: 0x7, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Monday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Monday.
 Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.MONDAY_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 0x8, editable, manual refresh, not exportable
 Security access level: 0

Can be used: in result, in condition, in sort
Object status: show

Object: Is a Tuesday?
Type: Character
Description: If checked, indicates that the job is to be done on a Tuesday.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.TUESDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0x9, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Is a Wednesday?
Type: Character
Description: If checked, indicates that the job is to be done on a Wednesday.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.WEDNESDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0xa, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Is a Thursday?
Type: Character
Description: If checked, indicates that the job is to be done on a Thursday.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.THURSDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0xb, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Is a Friday?
Type: Character
Description: If checked, indicates that the job is to be done on a Friday.

Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.FRIDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0xc, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Is a Saturday?**
Type: Character
Description: If checked, indicates that the job is to be done on a Saturday.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.SATURDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0xd, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Is a Sunday?**
Type: Character
Description: If checked, indicates that the job is to be done on a Sunday.
Select equivalent: CUS_VOLUNTEER_JOB_ASSIGNMENT.SUNDAY_FLAG
Where equivalent:

Qualification: dimension
List of values: 0xe, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Total Hours**
Type: Number
Description: Total no. of hours worked on the job.
Select equivalent: CUS_VOLUNTEER_JOB_HOURS_WORKED.TOTAL_HOURS
Where equivalent:

Qualification: measure
Aggregate function: Sum
List of values: 1eo, editable, manual refresh, not exportable
Security access level: 0

Can be used: in result, in condition, in sort
Object status: show

Class:	Volunteer Participation
Description:	Class contains information about volunteer's previous service history and committee participation.

No objects

Class:	Volunteer Service History
Description:	Class contains information about volunteer's service history.

Object: **Volunteer Type Code**
Type: Character
Description: User-defined. Suggested use is to use this to identify whether the volunteer is a staff person, an individual (who is not staff) or company.
Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.VOLUNTEER_TYPE_CODE
Where equivalent:

Qualification: dimension
List of values: 0xp, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Type Description**
Type: Character
Description: Description of the volunteer's type.
Select equivalent: APP_CODE_VOLUNTEER_TYPE_CODE.DESCR
Where equivalent:

Qualification: dimension
List of values: 1f3, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Class Code**

Type: Character
 Description: Optional field that allows an organization to categorize its volunteers.
 Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.VOLUNTEER_CLASS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0xq, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Class Description**
 Type: Character
 Description: Describes the volunteer's class.
 Select equivalent: APP_CODE_VOLUNTEER_CLASS_CODE.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1f4, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Service Start Date**
 Type: Date
 Description: The start date of the volunteer's service.
 Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.SERVICE_START_DATE
 Where equivalent:

Qualification: dimension
 List of values: 0xr, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Service End Date**
 Type: Date
 Description: The end date of the volunteer's service.
 Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.SERVICE_END_DATE
 Where equivalent:

Qualification: dimension
 List of values: 0xs, editable, manual refresh, not exportable

Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Security Level Code**
 Type: Character
 Description: Optional field that identifies the level of security background check undergone and passed by the volunteer. Typically needed for organizations using volunteers for events where children are attending.
 Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.SECURITY_LEVEL_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0xt, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Security Level Description**
 Type: Character
 Description: Describes the volunteer's security level.
 Select equivalent: APP_CODE_SECURITY_LEVEL_CODE.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1f5, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Volunteer Level Code**
 Type: Character
 Description: Optional field that allows an organization to assign levels to volunteers based on experience, training, or any other criterion.
 Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.VOLUNTEER_LEVEL_CODE

Where equivalent:

Qualification: dimension
List of values: 0xu, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Volunteer Level Description**
Type: Character
Description: Describes the volunteer level.
Select equivalent: APP_CODE_VOLUNTEER_LEVEL_CODE.DESCR
Where equivalent:

Qualification: dimension
List of values: 1f6, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Termination Reason Code**
Type: Character
Description: Code identifying the volunteer's termination reason.
Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.TERMINATION_REASON_CODE
Where equivalent:

Qualification: dimension
List of values: 0xv, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Termination Reason Description**
Type: Character
Description: Describes the volunteer termination reason.
Select equivalent: APP_CODE_TERM_REASON_CODE.DESCR
Where equivalent:

Qualification: dimension
List of values: 1f7, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Volunteer Service Source Code(Patty)

Type: Character

Description:

Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.VOLUNTEER_SERVICE_SOURCE_CODE

Where equivalent:

Qualification: dimension

List of values: 0xw, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: Volunteer Service Source Description

Type: Character

Description:

Select equivalent: APP_CODE_VOL_SERVICE_SOURCE.DESCR

Where equivalent:

Qualification: dimension

List of values: 1f8, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: Comments

Type: Character

Description: Comments related to volunteer service.

Select equivalent: CUS_VOLUNTEER_SERVICE_HISTORY.COMMENTS

Where equivalent:

Qualification: dimension

List of values: 0xx, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Class: Committee Participation History

Description: Class contains information about the volunteer's committee participation history.

Object: **Committee ID**

Type: Character
Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.
Select equivalent: CASE WHEN COM_COMMITTEE_MEMBER.COMMITTEE_SUB_CUST = 0 THEN COM_COMMITTEE_MEMBER.COMMITTEE_MAST_CUST ELSE COM_COMMITTEE_MEMBER.COMMITTEE_MAST_CUST + '-' + Convert(char, COM_COMMITTEE_MEMBER.COMMITTEE_SUB_CUST) END
Where equivalent:
Qualification: dimension
List of values: 10s, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Committee Master Customer ID**
Type: Character
Description: Identifies the master customer id of the committee.
Select equivalent: COM_COMMITTEE_MEMBER.COMMITTEE_MAST_CUST
Where equivalent:
Qualification: dimension
List of values: 0y5, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Committee Sub Customer ID**
Type: Number
Description: Identifies the sub customer id of the committee.
Select equivalent: COM_COMMITTEE_MEMBER.COMMITTEE_SUB_CUST
Where equivalent:
Qualification: dimension

List of values: 0y6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Committee Name**
 Type: Character
 Description: Identifies the name of the committee.
 Select equivalent: CUSTOMER_COMMITTEE.LABEL_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1f9, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Position Code**
 Type: Character
 Description: Identifies the position on the committee.
 Select equivalent: COM_COMMITTEE_MEMBER.POSITION_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0y9, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Position Description**
 Type: Character
 Description: Describes the position.
 Select equivalent: APP_CODE_POSITION_CODE.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 10v, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Position Subcode**

Type: Character
 Description: Identifies the sub category within the committee.
 Select equivalent: COM_COMMITTEE_MEMBER.POSITION_SUBCODE
 Where equivalent:

Qualification: dimension
 List of values: 0yg, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Position Subcode Description**
 Type: Character
 Description: Description of the position subcode.
 Select equivalent: APP_SUBCODE_POSITION.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 110, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Begin Date**
 Type: Date
 Description: The effective begin date on the committee.
 Select equivalent: COM_COMMITTEE_MEMBER.BEGIN_DATE
 Where equivalent:

Qualification: dimension
 List of values: 0ya, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **End Date**
 Type: Date
 Description: The end date on the committee.
 Select equivalent: COM_COMMITTEE_MEMBER.END_DATE
 Where equivalent:

Qualification: dimension
 List of values: 0yb, editable, manual refresh, not exportable

Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Representing Customer ID**

Type: Character

Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.

Select equivalent:

```
CASE WHEN COM_COMMITTEE_MEMBER.REPRESENTING_SUB_CUST = 0 THEN COM_COMMITTEE_MEMBER.REPRESENTING_MAST_CUST ELSE COM_COMMITTEE_MEMBER.REPRESENTING_MAST_CUST + '-' + Convert(char, COM_COMMITTEE_MEMBER.REPRESENTING_SUB_CUST) END
```

Where equivalent:

Qualification: dimension
 List of values: 10u, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Representing Master Customer ID**

Type: Character

Description: Identifies the master customer id of the representing customer.

Select equivalent:

```
COM_COMMITTEE_MEMBER.REPRESENTING_MAST_CUST
```

Where equivalent:

Qualification: dimension
 List of values: 0yc, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Representing Sub Customer ID**

Type: Number
Description: Identifies the sub customer id of the representing customer.
Select equivalent: COM_COMMITTEE_MEMBER.REPRESENTING_SUB_CUST
Where equivalent:

Qualification: dimension
List of values: 0yd, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Representing Customer Name**
Type: Character
Description: Identifies the name of the representing customer.
Select equivalent: CUSTOMER_REPRESENTING_CUS.LABEL_NAME
Where equivalent:

Qualification: dimension
List of values: 10w, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Participation Status Code**
Type: Character
Description: Identifies the participation status in the committee.
Select equivalent: COM_COMMITTEE_MEMBER.PARTICIPATION_STATUS_CODE
Where equivalent:

Qualification: dimension
List of values: 0ye, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Participation Status Description**
Type: Character
Description: Describes the participation status.
Select equivalent: APP_CODE_PARTICIPATION_CODE.DESCR
Where equivalent:

Qualification: dimension
List of values: 10x, editable, manual refresh, not exportable

Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Voting Status Code**
 Type: Character
 Description: Identifies the voting status of the committee position.
 Select equivalent: COM_COMMITTEE_MEMBER.VOTING_STATUS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0yf, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Voting Status Description**
 Type: Character
 Description: Describes the voting status.
 Select equivalent: APP_CODE_VOTING_STATUS.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 10y, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Comments**
 Type: Character
 Description: Comments related to the committee participation
 Select equivalent: COM_COMMITTEE_MEMBER.COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: 0yh, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Evaluation
Description:	Class contains information related to the volunteer's

evaluation. Many organizations conduct periodic reviews with volunteers. Some organizations record evaluations of volunteers after each job assignment is over, which can then be factored into the periodic review.

Object: **Evaluation Date**
 Type: Date
 Description: Date when the evaluation was done.
 Select equivalent: CUS_VOLUNTEER_EVALUATION.EVALUATION_DATE
 Where equivalent:

Qualification: dimension
 List of values: 10h, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Evaluated By User Id**
 Type: Character
 Description: User who evaluated the volunteer.
 Select equivalent: CUS_VOLUNTEER_EVALUATION.EVALUATED_BY_USER_ID
 Where equivalent:

Qualification: dimension
 List of values: 10i, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Overall Evaluation Score Code**
 Type: Character
 Description: User defined overall evaluation score of the volunteer.
 Select equivalent: CUS_VOLUNTEER_EVALUATION.OVERALL_EVALUATION_SCORE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 10j, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Overall Evaluation Score Description**
Type: Character
Description: Description of the evaluation score.
Select equivalent: APP_CODE_EVALUATION.DESCR
Where equivalent:

Qualification: dimension
List of values: 1gr, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Evaluation Period Begin Date**
Type: Date
Description: The effective begin date of the evaluation period.
Select equivalent: CUS_VOLUNTEER_EVALUATION.EVALUATION_PERIOD_BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: 10k, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Evaluation Period End Date**
Type: Date
Description: The end date of the evaluation period.
Select equivalent: CUS_VOLUNTEER_EVALUATION.EVALUATION_PERIOD_END_DATE
Where equivalent:

Qualification: dimension
List of values: 10l, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Evaluation Comments**
Type: Character
Description: Evaluation comments.
Select equivalent: CUS_VOLUNTEER_EVALUATION.EVALUATION_COMMENTS
Where equivalent:

Qualification: dimension
 List of values: 10m, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Demographics
Description:	Class contains demographics and list demographics information about a volunteer

Object: **Customer Class Code**
 Type: Character
 Description: This is the customer class code of the volunteer.
 Select equivalent: CUSTOMER_VOLUNTEER.CUSTOMER_CLASS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0k2, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Status Code**
 Type: Character
 Description: This is the customer status code of the volunteer.
 Select equivalent: CUSTOMER_VOLUNTEER.CUSTOMER_STATUS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0k3, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Status Date**
 Type: Date
 Description: This is the date when the customer status of the volunteer was last changed.
 Select equivalent: CUSTOMER_VOLUNTEER.CUSTOMER_STATUS_DATE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Primary Job Title**
Type: Character
Description: This is the primary job title of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.PRIMARY_JOB_TITLE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Function Code**
Type: Character
Description: This is the primary job function of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.JOB_FUNCTION_CODE
Where equivalent:

Qualification: dimension
List of values: 0k6, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Gender Code**
Type: Character
Description: This is the gender code of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.GENDER_CODE
Where equivalent:

Qualification: dimension
List of values: 0k7, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Ethnicity Code**
Type: Character
Description: This is the ethnicity code of the volunteer.
Select equivalent: CUSTOMER_VOLUNTEER.ETHNICITY_CODE

Where equivalent:

Qualification: dimension
 List of values: 0k8, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Birthdate**
 Type: Date
 Description: This is the birthdate of the volunteer.
 Select equivalent: CUSTOMER_VOLUNTEER.BIRTH_DATE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: List Demographics
Description: This class contains information about volunteer's list demographics.

Object: **List Demographic Code**
 Type: Character
 Description: This is the list demographic code of the volunteer.
 Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCR_VOLUNTEER_VW.DEMOGRAPHIC_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0kc, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **List Demographic Code Description**
 Type: Character
 Description: This is the description of the list demographic code of the volunteer.
 Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCR_VOLUNTEER_VW.DEMOGRAPHIC_CODE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0

Can be used: in result, in condition, in sort
Object status: show

Object: **List Demographic Subcode**
Type: Character
Description: This is the description of the list demographic subcode of the volunteer.
Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCR_VOLUNTEER_VW.DEMOGRAPHIC_SUBCODE
Where equivalent:

Qualification: dimension
List of values: 0ke, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **List Demographic Subcode Description**
Type: Character
Description: This is the description of the list demographic subcode of the volunteer.
Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCRIPTION_VOLUNTEER_VW.DEMOGRAPHIC_SUBCODE_DESCRIPTION
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **List Demographic Begin Date**
Type: Date
Description: This is the begin date of the list demographics of the volunteer.
Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCR_VOLUNTEER_VW.USER_D1
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **List Demographic End Date**

Type: Date
 Description: This is the end date of the list demographics of the volunteer.
 Select equivalent: CUS_DEMOGRAPHIC_CODE_DESCR_VOLUNTEER_VW.USER_D2
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Education
Description:	Class contains information about volunteer's educational qualification.

Object: **Educational Degree Code**
 Type: Character
 Description: Identifies the volunteer's educational degree code.
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.PROG_DEGREE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0wc, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Degree Description**
 Type: Character
 Description: Identifies the volunteer's educational degree description.
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.PROGRAM_DEGREE_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Degree Sort Order**
 Type: Number
 Description: This is the order in which the educational degrees appear.
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.PROGRAM_DEGREE_DISPLAY_OR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Program Type Code**
 Type: Character
 Description: Identifies the type of educational program attended by the volunteer.
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.PROG_TYPE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0wf, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Program Type Description**
 Type: Character
 Description: Identifies the description of the type of educational program attended by the
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.PROGRAM_TYPE_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Institution Short Name**
 Type: Character
 Description: Short name of the educational institution attended by the volunteer.
 Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.INSTITUTION
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Educational Institution Name**
Type: Character
Description: Name of the educational institution.
Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.INSTITUTION_NAME
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Degree Begin Date**
Type: Date
Description: Identifies the begin date of the volunteer's degree program.
Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Degree End Date**
Type: Date
Description: Identifies the end date of the volunteer's degree program.
Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.END_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Education Comments**
Type: Character
Description: These are the education comments.
Select equivalent: CUS_EDUCATION_CODE_VW_VOLUNTEER.COMMENTS
Where equivalent:

Qualification: dimension

List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: **Relationships**
 Description: Class contains information about the volunteer's primary employment relationship as well as all relationships

No objects

Class: **Individual Primary Employment**
 Description: This class contains information about an volunteer's primary employment.

Object: **Employer Full Name**
 Type: Character
 Description: Full name of the volunteer's primary employer.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_LABEL_NAME
 Where equivalent:

Qualification: dimension
 List of values: 0ww, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Primary Phone**
 Type: Character
 Description: Primary phone no. of the employer.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_PRIMARY_PHONE
 Where equivalent:

Qualification: dimension
 List of values: 13o, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Primary Fax**
 Type: Character
 Description: Primary fax no. of the employer.

Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_PRIMARY_FAX
 Where equivalent:

Qualification: dimension
 List of values: 13p, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Primary Email Address**
 Type: Character
 Description: Primary email address of the employer.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_PRIMARY_EMAIL_A
 Where equivalent:

Qualification: dimension
 List of values: 13q, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Customer Class Code**
 Type: Character
 Description: Primary employer's customer class.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_CUSTOMER_CLASS
 Where equivalent:

Qualification: dimension
 List of values: 0wy, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Customer Type**
 Type: Character
 Description: Rrecord type of the primary employer record.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_RECORD_TYPE
 Where equivalent:

Qualification: dimension
 List of values: 0x0, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Relationship Code**
 Type: Character
 Description: The relationship code for the primary employment relationship.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATIONSHIP_CODE
 Where equivalent:

Qualification: dimension
 List of values: 0x1, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Customer ID**
 Type: Character
 Description: This is the concatenation of the master customer id and the sub customer id of the primary employer.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_CUS_CusMastSubID
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Master Customer ID**
 Type: Character
 Description: Master customer id of the employer.
 Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_MASTER_CUSTOMER_ID
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employer Sub Customer ID**

Type: Number
Description: Sub customer id of the employer.
Select equivalent: Cus_Relationship_Primary_Employer_Info.RELATED_SUB_CUSTOMER_ID
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Employment Reciprocal Code**
Type: Character
Description: Primary employment reciprocal code.
Select equivalent: Cus_Relationship_Primary_Employer_Info.RECIPROCAL_CODE
Where equivalent:

Qualification: dimension
List of values: 0x5, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Employment Begin Date**
Type: Date
Description: Primary employment begin date.
Select equivalent: Cus_Relationship_Primary_Employer_Info.BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Employment End Date**
Type: Date
Description: Primary employment end date.
Select equivalent: Cus_Relationship_Primary_Employer_Info.END_DATE
Where equivalent:

Qualification: dimension
List of values: no

Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Primary Employer Membership Info
Description:	This class contains information related to primary employer's membership.

Object: **Primary Employer Member Type**
 Type: Character
 Description: Type of the primary employer's membership.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.NATIONAL_LEVEL
 Where equivalent:

Qualification: dimension
 List of values: 16d, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Membership Begin Date**
 Type: Date
 Description: Begin date of the customer's primary employer's membership.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.CYCLE_BEGIN_DA
 Where equivalent:

Qualification: dimension
 List of values: 16e, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Membership End Date**
 Type: Date
 Description: End date of the customer's primary employer's membership.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.CYCLE_END_DAT
 Where equivalent:

Qualification: dimension
 List of values: 16f, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Membership Grace Date**
Type: Date
Description: Grace date of customer's primary employer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.GRACE_DATE
Where equivalent:

Qualification: dimension
List of values: 16g, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Employer's Membership Description**
Type: Character
Description: Description of the volunteer's primary employer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.NATIONAL_DESCR
Where equivalent:

Qualification: dimension
List of values: 16h, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Employer's Member Since Date**
Type: Date
Description: Members since date of the volunteer's primary employer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.NATIONAL_SINCE
Where equivalent:

Qualification: dimension
List of values: 16i, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Employer's Chapter 1**
Type: Character
Description: Description of the volunteer's primary employer's membership 1st chapter.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.CHAPTER_DESCR
Where equivalent:

Qualification: dimension

List of values: 16j, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Chapter 2**
 Type: Character
 Description: Description of the volunteer's primary employer's membership 2nd chapter.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.CHAPTER2_DESCR
 Where equivalent:

Qualification: dimension
 List of values: 16k, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Section 1**
 Type: Character
 Description: Description of the volunteer's primary employer's membership 1st section.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.SECTION_DESCR
 Where equivalent:

Qualification: dimension
 List of values: 16l, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Employer's Section 2**
 Type: Character
 Description: Description of the volunteer's primary employer's membership 2nd chapter.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_PRIMARY_EMPLOYER.SECTION2_DESCR
 Where equivalent:

Qualification: dimension
 List of values: 16m, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	All Relationships
Description:	This class contains information related to all relationships of the customer.

Object: **Related Customer Full Name**
Type: Character
Description: This is the full name of the related customer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_LABEL_NA
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Related Customer Last First Name**
Type: Character
Description: This is the concatenation of the last name and first name of the related customer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_LAST_FIRST_NAME
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Related Customer Home Phone**
Type: Character
Description: This is the home phone number of the related customer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_HOME_PHONE
Where equivalent:

Qualification: dimension
List of values: 14c, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Related Customer Work Phone**
Type: Character
Description: This is the work phone number of the related customer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_WORK_PHONE
Where equivalent:

Qualification: dimension
 List of values: 14d, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Related Customer Primary Phone**
 Type: Character
 Description: This is the primary phone number of the related customer.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_PRIMARY
 Where equivalent:

Qualification: dimension
 List of values: 14e, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Related Customer Primary Fax**
 Type: Character
 Description: This is the primary fax number of the related customer.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_PRIMARY
 Where equivalent:

Qualification: dimension
 List of values: 14f, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Related Customer Primary Email Address**
 Type: Character
 Description: This is the primary email address of the related customer.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_PRIMARY_EMAIL_ADDRESS

Where equivalent:

Qualification: dimension
 List of values: 14g, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Related Customer Class Code**
 Type: Character
 Description: This is the customer class code of the related customer.
 Select equivalent: Cus_Relationship_Voluntee
 r_Related_Cus_Info_VW.REL
 ATED_CUS_CUSTOMER_CLASS
 _CODE
 Where equivalent:
 Qualification: dimension
 List of values: 0ym, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Related Customer Record Type**
 Type: Character
 Description: This is the record type of the related customer.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_RECORD_
 Where equivalent:
 Qualification: dimension
 List of values: 0yn, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Relationship Code**
 Type: Character
 Description: This is the relationship code of the parent company.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATIONSHIP_CODE
 Where equivalent:
 Qualification: dimension
 List of values: 0yo, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Related Customer Customer ID**

Type: Character
 Description: This is the concatenation of the master customer id and sub customer id of the parent company.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_CUS_CusMastS
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Related Customer Master Customer ID
 Type: Character
 Description: This is the master customer id of the parent company.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_MASTER_CUST
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Related Customer Sub Customer ID
 Type: Number
 Description: This is the sub customer id of the parent company.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATED_SUB_CUSTOME
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Related Customer Reciprocal Code
 Type: Character
 Description: This is the reciprocal relationship code for the parent company.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RECIPROCAL_CODE
 Where equivalent:

Qualification: dimension
List of values: 0ys, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Related Customer Begin Date**
Type: Date
Description: This is the begin date of the parent/subsidiary relationship.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Related Customer End Date**
Type: Date
Description: This is the end date of the parent/subsidiary relationship.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.END_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Relationship Type Code**
Type: Character
Description: This is the record type of the related customer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATIONSHIP_TYPE
Where equivalent:

Qualification: dimension
List of values: 0yv, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object:	Relationship Type Description
Type:	Character
Description:	This is the description of the relationship type code for the related customer.
Select equivalent:	Cus_Relationship_Volunteer_Related_Cus_Info_VW.RELATIONSHIP_TYPE_DE
Where equivalent:	
Qualification:	dimension
List of values:	no
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Relationship Type Sort Order
Type:	Number
Description:	This is the sort order of the relationship type for the related customer.
Select equivalent:	Cus_Relationship_Voluntee r_Related_Cus_Info_VW.REL ATIONSHIP_TYPE_DISPLAY_O RDER
Where equivalent:	
Qualification:	dimension
List of values:	no
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Employment Job Function Code
Type:	Character
Description:	This is the job function code of the related customer.
Select equivalent:	Cus_Relationship_Voluntee r_Related_Cus_Info_VW.REL ATIONSHIP_JOB_FUNCTION_C ODE
Where equivalent:	
Qualification:	dimension
List of values:	103, editable, automatic refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object: **Hierarchical Relationship?**
Type: Character
Description: This indicates if the relationship is hierarchical.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.HIERARCHICAL_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Employment Relationship?**
Type: Character
Description: This indicates if the relationship is an employment relationship.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.EMPLOYMENT_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Primary Employer Relationship?**
Type: Character
Description: This indicates if the employer is a primary employer.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.PRIMARY_EMPLOYER_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Full-Time Employment?**
Type: Character
Description: This indicates if the employment is full time.
Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.FULL_TIME_FLAG
Where equivalent:

Qualification: dimension

List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Employment Supervisor Name**
 Type: Character
 Description: This is the employment supervisor's name.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.SUPERVISOR_NAME
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Primary Contact Relationship?**
 Type: Character
 Description: This indicates if the contact is a primary contact.
 Select equivalent: Cus_Relationship_Volunteer_Related_Cus_Info_VW.PRIMARY_CONTACT_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Volunteer Current Primary Membership
Description:	Class contains information about the volunteer's primary membership.

Object: **Customer Member Type**
 Type: Character
 Description: This is the type of volunteer's membership.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.NATIONAL_LEVEL2
 Where equivalent:

Qualification: dimension
 List of values: 106, editable, automatic refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Membership Begin Date**
Type: Date
Description: This is the begin date of the volunteer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.CYCLE_BEGIN_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Customer Membership End Date**
Type: Date
Description: This is the end date of the volunteer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.CYCLE_END_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Customer Membership Grace Date**
Type: Date
Description: This is the grace date of volunteer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.GRACE_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Customer Membership Description**
Type: Character
Description: This is the description of the volunteer's membership.
Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.NATIONAL_DESCR
Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Member Since Date**
 Type: Date
 Description: This is the members since date of the volunteer's membership.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.NATIONAL_SINCE_DATE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Chapter 1**
 Type: Character
 Description: This is the description of the volunteer's membership 1st chapter.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.CHAPTER_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Chapter 2**
 Type: Character
 Description: This is the description of the volunteer's membership 2nd chapter.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.CHAPTER2_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Section 1**
 Type: Character
 Description: This is the description of the volunteer's membership 1st section.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.SECTION_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Section 2**
 Type: Character
 Description: This is the description of the volunteer's membership 2nd chapter.
 Select equivalent: CUS_CURRENT_MEMBERSHIP_INFO_VOLUNTEER.SECTION2_DESCR
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: Contact Tracking
Description: Class contains information about the volunteer's contact.

Object: **Contact Tracking Date**
 Type: Date
 Description: This is the contact tracking date.
 Select equivalent: CUS_ACTIVITY_CONTACT.ACTIVITY_DATE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Tracking Letter ID**
 Type: Character
 Description: This is the contact tracking letter id.
 Select equivalent: CUS_ACTIVITY_CONTACT.LETTER_ID
 Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Activity Text**
Type: Character
Description: This is tehe activity text for the activity.
Select equivalent: CUS_ACTIVITY_CONTACT.ACTIVITY_TEXT
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Call Type**
Type: Character
Description: This is the call type for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.CALL_TYPE_CODE
Where equivalent:

Qualification: dimension
List of values: 119, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Call Topic Code**
Type: Character
Description: This is the call topic code for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.CALL_TOPIC_CODE
Where equivalent:

Qualification: dimension
List of values: 11a, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Staff User ID**
Type: Character
Description: This is the staff user id of the staff who is assigned to handle the contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.STAFF_USER_ID
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Call Topic Subcode**
Type: Character
Description: This is the call topic subcode for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.CALL_TOPIC_SUBCODE
Where equivalent:

Qualification: dimension
List of values: 11b, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Followup Date**
Type: Date
Description: This is the followup date for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.FOLLOWUP_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Followup Action Date**
Type: Date
Description: This is the followup action date for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.FOLLOWUP_ACTION_DATE
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Comments**
Type: Long text
Description: These are the comments for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.COMMENTS
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Key Code**
Type: Character
Description: This is the key code for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.KEY_CODE
Where equivalent:

Qualification: dimension
List of values: 11g, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Market Code**
Type: Character
Description: This is the market code for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.MARKET_CODE
Where equivalent:

Qualification: dimension
List of values: 11h, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking List Code**
Type: Character
Description: This is the list code for contact tracking.
Select equivalent: CUS_ACTIVITY_CONTACT.LIST_CODE
Where equivalent:

Qualification: dimension
List of values: 11i, editable, automatic refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Person Contacted Name**
Type: Character
Description: This is the person contacted by the contact tracking staff.
Select equivalent: CUS_ACTIVITY_CONTACT.PERSON_CONTACTED
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Customer Contacted Customer ID**
Type: Character
Description: This is the master customer id of the person contacted by the contact tracking staff.
Select equivalent: CUS_ACTIVITY_CONTACT.REFERENCE_MAST_CUST
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Customer Contacted Master Customer ID**
Type: Character
Description: This is the master customer id of the customer contacted by the contact tracking staff.
Select equivalent: CUS_ACTIVITY_CONTACT.REFERENCE_MAST_CUST
Where equivalent:

Qualification: dimension

List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Contacted Sub Customer ID**
 Type: Number
 Description: This is the sub customer id of the customer contacted by the contact tracking
 Select equivalent: CUS_ACTIVITY_CONTACT.REFERENCE_SUB_CUST
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Customer Contacted Last First Name**
 Type: Character
 Description: This is the concatenation
 of the last name and the f
 irst name of the customer
 contacted by the contact t
 racking staff.
 Select equivalent: CUSTOMER_CONTACT_REFERENCE.LAST_FIRST_NAME
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Tracking Resolved Flag**
 Type: Character
 Description: This indicates whether the contact tracking issue has been resolved.
 Select equivalent: CUS_ACTIVITY_CONTACT.RESOLVED_FLAG
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Contact Tracking Resolved Date**
 Type: Date
 Description: This is the date when the contact tracking issue was resolved.
 Select equivalent: CUS_ACTIVITY_CONTACT.RESOLVED_DATE
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Tracking Employer Customer ID**
 Type: Character
 Description: This is the concatenation of the master customer id and sub customer id of the employer of the customer who contacted the organization.
 Select equivalent: CUS_ACTIVITY_CONTACT.EMPLOYER_MAST_CUST
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Contact Tracking Employer Master Customer ID**
 Type: Character
 Description: This is the master customer id of the employer of the customer who contacted the organization.
 Select equivalent: CUS_ACTIVITY_CONTACT.EMPLOYER_MAST_CUST
 Where equivalent:

Qualification: dimension
 List of values: no
 Security access level: 0

Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Employer Sub Customer ID**
Type: Number
Description: This is the sub customer id of the employer of the customer who contacted the organization.
Select equivalent: CUS_ACTIVITY_CONTACT.EMPLOYER_SUB_CUST
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Contact Tracking Employer Full Name**
Type: Character
Description: This is the full name of the employer of the customer who contacted the organization.
Select equivalent: CUSTOMER_CONTACT_EMPLOYER.LABEL_NAME
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Private Contact?**
Type: Character
Description: This indicates if it is a private contact.
Select equivalent: CUS_ACTIVITY_CONTACT.PRIVATE_CONTACT_FLAG
Where equivalent:

Qualification: dimension
List of values: no
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Class:	Event Info
--------	-------------------

Description: Class contains information about the volunteer events.

Object: **Event Code**
 Type: Character
 Description: User Defined job code. This identifies the job within the event.
 Select equivalent: VOL_EVENT.EVENT_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1b5, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Description**
 Type: Character
 Description: Describes the event.
 Select equivalent: VOL_EVENT.EVENT_DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1b8, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Subcode**
 Type: Character
 Description: Enables the user to define sub catogries for the volunteer jobs.
 Select equivalent: VOL_EVENT.EVENT_SUBCODE
 Where equivalent:

Qualification: dimension
 List of values: 1b6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Department Code**
 Type: Character
 Description: Identifies the code of the department for which the volunteer job has been cr
 Select equivalent: VOL_EVENT.DEPARTMENT_CODE
 Where equivalent:

Qualification: dimension
List of values: 1b7, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Department Description**
Type: Character
Description: Description of the department.
Select equivalent: APP_CODE_DEPARTMENT.DESCR
Where equivalent:

Qualification: dimension
List of values: 1dh, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Start Date**
Type: Date
Description: Start date of the event.
Select equivalent: VOL_EVENT.EVENT_START_DATE
Where equivalent:

Qualification: dimension
List of values: 1b9, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event End Date**
Type: Date
Description: End date of the event.
Select equivalent: VOL_EVENT.EVENT_END_DATE
Where equivalent:

Qualification: dimension
List of values: 1ba, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object:	Event Status Code
Type:	Character
Description:	Identifies whether an event is active or not. No predefined business rules are enforced related to event status; volunteers can still be assigned to events that are not active, and jobs can still be created for events that are not active.
Select equivalent:	VOL_EVENT.EVENT_STATUS_CODE
Where equivalent:	
Qualification:	dimension
List of values:	1bb, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Event Status Description
Type:	Character
Description:	Description of the event status.
Select equivalent:	APP_CODE_EVENT_STATUS.DESCR
Where equivalent:	
Qualification:	dimension
List of values:	1dj, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort
Object status:	show

Object:	Event Category Code
Type:	Character
Description:	This code categorizes the event.
Select equivalent:	VOL_EVENT.EVENT_CATEGORY_CODE
Where equivalent:	
Qualification:	dimension
List of values:	1bc, editable, manual refresh, not exportable
Security access level:	0
Can be used:	in result, in condition, in sort

Object status: show

Object: **Event Category Description**
 Type: Character
 Description: Description of the event category.
 Select equivalent: APP_CODE_EVENT_CATEGORY.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1di, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact ID**

Type: Character
 Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.

Select equivalent: CASE WHEN VOL_EVENT.PRIMARY_CONTACT_SUB_CUST = 0 THEN VOL_EVENT.PRIMARY_CONTACT_MAST_CUST ELSE VOL_EVENT.PRIMARY_CONTACT_MAST_CUST + '-' + Convert(char, VOL_EVENT.PRIMARY_CONTACT_SUB_CUST) END

Where equivalent:

Qualification: dimension
 List of values: 1dk, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact Master Customer ID**

Type: Character
 Description: Master Customer ID of the primary contact for the event.
 Select equivalent: VOL_EVENT.PRIMARY_CONTACT_MAST_CUST

Where equivalent:

Qualification: dimension
 List of values: 1bd, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact Sub Customer ID**
 Type: Number
 Description: Sub Customer ID of the primary contact for the event.
 Select equivalent: VOL_EVENT.PRIMARY_CONTACT_SUB_CUST
 Where equivalent:

Qualification: dimension
 List of values: 1be, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact Name**
 Type: Character
 Description: Name of the Primary Contact.
 Select equivalent: CUSTOMER_EVENT_PRIMARY_CONTACT.LABEL_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1dl, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact Last First Name**
 Type: Character
 Description: Concatenation of the last name and the first name of the primary contact.
 Select equivalent: CUSTOMER_EVENT_PRIMARY_CONTACT.LAST_FIRST_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1dm, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Primary Contact Primary Phone**
Type: Character
Description: Primary phone no. of the primary contact.
Select equivalent: CUSTOMER_EVENT_PRIMARY_CONTACT.PRIMARY_PHONE
Where equivalent:

Qualification: dimension
List of values: 1dn, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Primary Contact Primary Fax**
Type: Character
Description: Primaryfax no. of the primary contact.
Select equivalent: CUSTOMER_EVENT_PRIMARY_CONTACT.PRIMARY_FAX
Where equivalent:

Qualification: dimension
List of values: 1do, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Primary Contact Primary Email**
Type: Character
Description: Primary email of the primary contact.
Select equivalent: CUSTOMER_EVENT_PRIMARY_CONTACT.PRIMARY_EMAIL_ADDRESS
Where equivalent:

Qualification: dimension
List of values: 1dp, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Location**
Type: Character
Description: The location where the event is held.
Select equivalent: VOL_EVENT.EVENT_LOCATION
Where equivalent:

Qualification: dimension
List of values: 1bf, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Location Address**
Type: Character
Description: Address of the event location.
Select equivalent: VOL_EVENT.EVENT_LOCATION_ADDR
Where equivalent:

Qualification: dimension
List of values: 1bg, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event City**
Type: Character
Description: City of the event.
Select equivalent: VOL_EVENT.EVENT_CITY
Where equivalent:

Qualification: dimension
List of values: 1bh, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event State Code**
Type: Character
Description: State of the event.
Select equivalent: VOL_EVENT.EVENT_STATE_CODE
Where equivalent:

Qualification: dimension
List of values: 1bi, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Country Code**
Type: Character
Description: Country where the event is held.
Select equivalent: VOL_EVENT.EVENT_COUNTRY_CODE
Where equivalent:

Qualification: dimension
List of values: 1bj, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Purpose**
Type: Character
Description: Purpose of the event.
Select equivalent: VOL_EVENT.EVENT_PURPOSE
Where equivalent:

Qualification: dimension
List of values: 1bk, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Event Creation Source Code**
Type: Character
Description: An Event Creation Source Code is maintained to identify how the event was created.
Select equivalent: VOL_EVENT.EVENT_CREATION_SOURCE_CODE
Where equivalent:

Qualification: dimension
List of values: 1bm, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Comments**
Type: Character
Description: Comments related to the event.
Select equivalent: VOL_EVENT.COMMENTS
Where equivalent:

Qualification: dimension
 List of values: 1bu, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Publish To Web?
 Type: Character
 Description: Indicates if the event should be published over the web.
 Select equivalent: VOL_EVENT.PUBLISH_TO_WEB_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1bs, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Include In Calendar?
 Type: Character
 Description: Indicates if the event should be included in the calender.
 Select equivalent: VOL_EVENT.INCLUDE_IN_CALENDAR_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1bt, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: No of Volunteers needed for the event
 Type: Number
 Description: No. of volunteers needed for the event.
 Select equivalent: VOL_EVENT.VOLUNTEER_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1bl, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: **Event Links**
 Description: Class contains information about committee and products linked to the event.

No objects

Class: Committee Link
Description: Class contains information about Committee linked to the event.

Object: **Event Committee ID**
 Type: Character
 Description: Event Committee ID
 Select equivalent: Case when VOL_EVENT.EVENT
 T_COMMITTEE_SUB_CUST = 0
 THEN VOL_EVENT.EVENT_CO
 MMITTEE_MAST_CUST ELSE V
 OL_EVENT.EVENT_COMMITTE
 E_MAST_CUST+'- '+CONVERT
 (CHAR,VOL_EVENT.EVENT_CO
 MMITTEE_SUB_CUST)END

Where equivalent:

Qualification: dimension
 List of values: 1h9, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Committee Master Customer ID**
 Type: Character
 Description: Master Customer ID of the Committee linked to the event.
 Select equivalent: VOL_EVENT.EVENT_COMMITTEE_MAST_CUST
 Where equivalent:

Qualification: dimension
 List of values: 1dq, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Committee Sub Customer ID**
 Type: Number
 Description: Sub Customer ID of the Committee linked to the event.
 Select equivalent: VOL_EVENT.EVENT_COMMITTEE_SUB_CUST
 Where equivalent:

Qualification: dimension
 List of values: 1dr, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Committee Name**
 Type: Character
 Description: Name of the Committee linked to the event.
 Select equivalent: CUSTOMER_EVENT_COMMITTEE.LABEL_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1du, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class: **Product Link**
 Description: Class contains information about product linked to the event.

Object: **Subsystem**
 Type: Character
 Description: The subsystem of the product linked to the event.
 Select equivalent: PRODUCT.SUBSYSTEM
 Where equivalent:

Qualification: dimension
 List of values: 1dw, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Event Parent Product**
 Type: Character
 Description: Parent product code of the product associated with the event.
 Select equivalent: VOL_EVENT.EVENT_PARENT_PRODUCT
 Where equivalent:

Qualification: dimension
 List of values: 1ds, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Event Product Code**
 Type: Character
 Description: Product code of the product associated with the event.
 Select equivalent: VOL_EVENT.EVENT_PRODUCT_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1dt, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Product Short Name**
 Type: Character
 Description: Short name of the product associated with the event.
 Select equivalent: PRODUCT.SHORT_NAME
 Where equivalent:

Qualification: dimension
 List of values: 1dv, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Product Type Code**
 Type: Character
 Description: Product type of the product associated with the event.
 Select equivalent: PRODUCT.PRODUCT_TYPE_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1dx, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Product Type Description**
 Type: Character
 Description: Description of the product type of the product associated with the event.
 Select equivalent: APP_CODE_PRODUCT_TYPE.DESCR

Where equivalent:

Qualification: dimension
 List of values: 1e1, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Product Class Code**
 Type: Character
 Description: Product class of the product associated with the event.
 Select equivalent: PRODUCT.PRODUCT_CLASS_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1dy, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Product Class Description**
 Type: Character
 Description: Description of the product class of the product associated with the event.
 Select equivalent: APP_CODE_PRODUCT_CLASS.DESCR
 Where equivalent:

Qualification: dimension
 List of values: 1e0, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Event Job Info
Description:	Class contains information about jobs within the event.

Object: **Event Code**
 Type: Character
 Description: User Defined job code. This identifies the job within the event.
 Select equivalent: VOL_EVENT_JOB.EVENT_CODE
 Where equivalent:

Qualification: dimension
 List of values: 1c5, editable, manual refresh, not exportable
 Security access level: 0

Can be used: in result, in condition, in sort
Object status: show

Object: Event Subcode
Type: Character
Description: Enables the user to define sub catogries for the volunteer jobs.
Select equivalent: VOL_EVENT_JOB.EVENT_SUBCODE
Where equivalent:

Qualification: dimension
List of values: 1c6, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Job Code
Type: Character
Description: Identifies the job at the event.
Select equivalent: VOL_EVENT_JOB.JOB_CODE
Where equivalent:

Qualification: dimension
List of values: 1c7, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Job Description
Type: Character
Description: Description of the job.
Select equivalent: VOL_EVENT_JOB.JOB_DESCR
Where equivalent:

Qualification: dimension
List of values: 1c8, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: Job Recurrence Code(Patty description)
Type: Character
Description:

Select equivalent: VOL_EVENT_JOB.JOB_RECURRENCE_CODE
Where equivalent:

Qualification: dimension
List of values: 1c9, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Recurrence Description**
Type: Character
Description:

Select equivalent: APP_CODE_JOB_RECURRENCE.DESCR
Where equivalent:

Qualification: dimension
List of values: 1e2, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Schedule Type Code (Future)**
Type: Character
Description:

Select equivalent: VOL_EVENT_JOB.SCHEDULE_TYPE_CODE
Where equivalent:

Qualification: dimension
List of values: 1ca, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Category Code**
Type: Character
Description: Categorizes the job.
Select equivalent: VOL_EVENT_JOB.JOB_CATEGORY_CODE
Where equivalent:

Qualification: dimension

List of values: 1cb, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Category Description**
Type: Character
Description: Description of the job category.
Select equivalent: APP_CODE_JOB_CATEGORY.DESCR
Where equivalent:

Qualification: dimension
List of values: 1e3, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Start Date**
Type: Date
Description: Start date of the job.
Select equivalent: VOL_EVENT_JOB.JOB_START_DATE
Where equivalent:

Qualification: dimension
List of values: 1cc, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job End Date**
Type: Date
Description: End date of the job.
Select equivalent: VOL_EVENT_JOB.JOB_END_DATE
Where equivalent:

Qualification: dimension
List of values: 1cd, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Security Level Code**

Type: Character
 Description: Optional field that identifies the level of security background check undergone and passed by the volunteer. Typically needed for organizations using volunteers for events where children are attending.
 Select equivalent: VOL_EVENT_JOB.SECURITY_LEVEL_CODE
 Where equivalent:
 Qualification: dimension
 List of values: 1ce, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Job Security Level Description
 Type: Character
 Description: Description of the security level.
 Select equivalent: APP_CODE_SEC_LEVEL.DESCR
 Where equivalent:
 Qualification: dimension
 List of values: 1e6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: Job Volunteer Level Code
 Type: Character
 Description: Optional field that allows an organization to assign levels to volunteers based on experience, training, or any other criterion.
 Select equivalent: VOL_EVENT_JOB.VOLUNTEER_LEVEL_CODE
 Where equivalent:
 Qualification: dimension
 List of values: 1cf, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Job Volunteer Level Description**

Type: Character

Description: Description of the volunteer level.

Select equivalent: APP_CODE_VOL_LEVEL.DESCR

Where equivalent:

Qualification: dimension

List of values: 1fc, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Job Primary Contact ID**

Type: Character

Description: This is the concatenation of the master customer id and the sub customer id if the sub customer id is not 0, else it is the master customer id.

Select equivalent: CASE WHEN VOL_EVENT_JOB.PRIMARY_CONTACT_SUB_CUST = 0 THEN VOL_EVENT_JOB.PRIMARY_CONTACT_MAST_CUST ELSE VOL_EVENT_JOB.PRIMARY_CONTACT_MAST_CUST + '-' + Convert(char, VOL_EVENT_JOB.PRIMARY_CONTACT_SUB_CUST) END

Where equivalent:

Qualification: dimension

List of values: 1e7, editable, manual refresh, not exportable

Security access level: 0

Can be used: in result, in condition, in sort

Object status: show

Object: **Job Primary Contact Master Customer ID**

Type: Character

Description: Master Customer ID of the primary contact for the job.

Select equivalent: VOL_EVENT_JOB.PRIMARY_CONTACT_MAST_CUST

Where equivalent:

Qualification: dimension
 List of values: 1cl, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Primary Contact Sub Customer ID**
 Type: Number
 Description: Sub Customer ID of the primary contact for the job.
 Select equivalent: VOL_EVENT_JOB.PRIMARY_CONTACT_SUB_CUST
 Where equivalent:

Qualification: dimension
 List of values: 1cm, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Primary Contact Phone**
 Type: Character
 Description: Phone no. of the primary contact for the job.
 Select equivalent: VOL_EVENT_JOB.PRIMARY_CONTACT_PHONE
 Where equivalent:

Qualification: dimension
 List of values: 1cn, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Primary Contact Email**
 Type: Character
 Description: Email of the primary contact for the job.
 Select equivalent: VOL_EVENT_JOB.PRIMARY_CONTACT_EMAIL
 Where equivalent:

Qualification: dimension
 List of values: 1co, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Location**
Type: Character
Description: The location of the event job.
Select equivalent: VOL_EVENT_JOB.JOB_LOCATION
Where equivalent:

Qualification: dimension
List of values: 1cp, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Location Address**
Type: Character
Description: Event job location address.
Select equivalent: VOL_EVENT_JOB.JOB_LOCATION_ADDR
Where equivalent:

Qualification: dimension
List of values: 1cq, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job City**
Type: Character
Description: Event job city
Select equivalent: VOL_EVENT_JOB.JOB_CITY
Where equivalent:

Qualification: dimension
List of values: 1cr, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job State Code**
Type: Character
Description: Event job state.
Select equivalent: VOL_EVENT_JOB.JOB_STATE_CODE
Where equivalent:

Qualification: dimension
List of values: 1cs, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Job Country Code**
Type: Character
Description: Event job country.
Select equivalent: VOL_EVENT_JOB.JOB_COUNTRY_CODE
Where equivalent:

Qualification: dimension
List of values: 1ct, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Assignment Permission Code (Future)**
Type: Character
Description:
Select equivalent: VOL_EVENT_JOB.ASSIGNMENT_PERMISSION_CODE
Where equivalent:

Qualification: dimension
List of values: 1cu, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort
Object status: show

Object: **Update Hours Rule Code(Future)**
Type: Character
Description:
Select equivalent: VOL_EVENT_JOB.UPDATE_HOURS_RULE_CODE
Where equivalent:

Qualification: dimension
List of values: 1d2, editable, manual refresh, not exportable
Security access level: 0
Can be used: in result, in condition, in sort

Object status: show

Object: **Comments**
 Type: Character
 Description: Comments related to the job.
 Select equivalent: VOL_EVENT_JOB.COMMENTS
 Where equivalent:

Qualification: dimension
 List of values: 1d3, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Publish To Web?**
 Type: Character
 Description: Indicates if the event job should be published over the web.
 Select equivalent: VOL_EVENT_JOB.PUBLISH_TO_WEB_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1cv, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Include In Schedule?**
 Type: Character
 Description: Indicates if the event job should be included in the calendar.
 Select equivalent: VOL_EVENT_JOB.INCLUDE_IN_SCHEDULE_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1cw, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Check For Schedule Conflicts?**
 Type: Character
 Description: Indicates whether schedule conflicts should be checked during job assignment.
 Select equivalent: VOL_EVENT_JOB.CHECK_FOR_SCHEDULE_CONFLICTS_FLAG

Where equivalent:

Qualification: dimension
 List of values: 1cx, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Update Hours Worked? (Future)**

Type: Character

Description:

Select equivalent: VOL_EVENT_JOB.UPDATE_HOURS_WORKED_FLAG

Where equivalent:

Qualification: dimension
 List of values: 1d0, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Monday?**

Type: Character

Description: If checked, indicates that the job is to be done on a Monday.

Select equivalent: VOL_EVENT_JOB.MONDAY_FLAG

Where equivalent:

Qualification: dimension
 List of values: 1d4, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Tuesday?**

Type: Character

Description: If checked, indicates that the job is to be done on a Tuesday.

Select equivalent: VOL_EVENT_JOB.TUESDAY_FLAG

Where equivalent:

Qualification: dimension
 List of values: 1d5, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort

Object status: show

Object: **Is a Wednesday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Wednesday.
 Select equivalent: VOL_EVENT_JOB.WEDNESDAY_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1d6, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Thursday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Thursday.
 Select equivalent: VOL_EVENT_JOB.THURSDAY_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1d7, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Friday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Friday.
 Select equivalent: VOL_EVENT_JOB.FRIDAY_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1d8, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Saturday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Saturday.
 Select equivalent: VOL_EVENT_JOB.SATURDAY_FLAG

Where equivalent:

Qualification: dimension
 List of values: 1d9, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Is a Sunday?**
 Type: Character
 Description: If checked, indicates that the job is to be done on a Sunday.
 Select equivalent: VOL_EVENT_JOB.SUNDAY_FLAG
 Where equivalent:

Qualification: dimension
 List of values: 1da, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Total Volunteers Needed for the job**
 Type: Number
 Description: Total no. volunteers needed for the job.
 Select equivalent: VOL_EVENT_JOB.VOLUNTEERS_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1ch, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Volunteers Assigned**
 Type: Number
 Description: No. of volunteers assigned to the job.
 Select equivalent: VOL_EVENT_JOB.VOLUNTEERS_ASSIGNED_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1ci, editable, manual refresh, not exportable
 Security access level: 0

Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Volunteers Confirmed**
 Type: Number
 Description: No. of volunteers confirmed for the job.
 Select equivalent: VOL_EVENT_JOB.VOLUNTEERS_CONFIRMED_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1cj, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Job Volunteers Unassigned**
 Type: Number
 Description: No. of unassigned volunteers for the job.
 Select equivalent: VOL_EVENT_JOB.VOLUNTEERS_UNASSIGNED_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1ck, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Required Minimum Hours (for the Job)**
 Type: Number
 Description: Minimum no. of hours required for the job.
 Select equivalent: VOL_EVENT_JOB.REQUIRED_MINIMUM_HOURS
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1cy, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Default Daily Hours Qty (for the job)**
 Type: Number
 Description: Default daily hours.
 Select equivalent: VOL_EVENT_JOB.DEFAULT_DAILY_HOURS_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1d1, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Default Job Hours Qty (for the job)**
 Type: Number
 Description: Default job hours.
 Select equivalent: VOL_EVENT_JOB.DEFAULT_JOB_HOURS_QTY
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1db, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Object: **Hourly Rate**
 Type: Number
 Description: Identifies the hourly value of a volunteer performing this job.
 Select equivalent: VOL_EVENT_JOB.HOURLY_RATE
 Where equivalent:

Qualification: measure
 Aggregate function: Sum
 List of values: 1cg, editable, manual refresh, not exportable
 Security access level: 0
 Can be used: in result, in condition, in sort
 Object status: show

Class:	Job Assignment Conditions
Description:	Job Assignment Conditions

No objects

Class: **Volunteer Availability**
 Description: Class contains volunteer availability information.

No objects

Class: **Job Availability**
 Description: Class contains conditions for job availability on each day of the week.

No objects

Class: **Active Volunteers**
 Description:

No objects

Class: **Events**
 Description:

No objects

Condition List

No Conditions

Conditions

Class: **Job Assignment Conditions**
 Description: Job Assignment Conditions

Jobs With Volunteer Openings

Description:Jobs that have open volunteer positions.

Where Equivalent:VOL_EVENT_JOB.VOLUNTEERS_QTY - VOL_EVENT_JOB.VOLUNTEERS_CONFIRMED_QTY > 0

Class: **Volunteer Availability**
 Description: Class contains volunteer availability information.

Volunteers Available Monday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_MONDAY_AM_FLAG = 'Y'

Volunteers Available Monday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_MONDAY_PM_FLAG = 'Y'

Volunteers Available Tuesday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_TUESDAY_AM_FLAG = 'Y'

Volunteers Available Tuesday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_TUESDAY_PM_FLAG = 'Y'

Volunteers Available Wednesday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_AM_FLAG = 'Y'

Volunteers Available Wednesday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_WEDNESDAY_PM_FLAG = 'Y'

Volunteers Available Thursday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_THURSDAY_AM_FLAG = 'Y'

Volunteers Available Thursday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_THURSDAY_PM_FLAG = 'Y'

Volunteers Available Friday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_FRIDAY_AM_FLAG = 'Y'

Volunteers Available Friday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_FRIDAY_PM_FLAG = 'Y'

Volunteers Available Saturday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_SATURDAY_AM_FLAG = 'Y'

Volunteers Available Saturday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_SATURDAY_PM_FLAG = 'Y'

Volunteers Available Sunday AM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_SUNDAY_AM_FLAG = 'Y'

Volunteers Available Sunday PM

Description:

Where Equivalent:CUS_VOLUNTEER.AVAILABLE_SUNDAY_PM_FLAG = 'Y'

Class:

Job Availability

Description:

Class contains conditions for job availability on each day of the week.

Jobs available on Monday

Description:

Where Equivalent:VOL_EVENT_JOB.MONDAY_FLAG = 'Y'

Jobs available on Tuesday

Description:

Where Equivalent:VOL_EVENT_JOB.TUESDAY_FLAG = 'Y'

Jobs available on Wednesday

Description:

Where Equivalent:VOL_EVENT_JOB.WEDNESDAY_FLAG = 'Y'

Jobs available on Thursday

Description:

Where Equivalent:VOL_EVENT_JOB.THURSDAY_FLAG = 'Y'

Jobs available on Friday

Description:

Where Equivalent:VOL_EVENT_JOB.FRIDAY_FLAG = 'Y'

Jobs available on Saturday

Description:

Where Equivalent:VOL_EVENT_JOB.SATURDAY_FLAG = 'Y'

Jobs available on Sunday

Description:

Where Equivalent:VOL_EVENT_JOB.SUNDAY_FLAG = 'Y'

Class:

Active Volunteers

Description:

Active Volunteers

Description:

Where Equivalent:CUS_VOLUNTEER.VOLUNTEER_STATUS_CODE='ACTIVE'

Class:

Events

Description:

Future Events

Description:

Where Equivalent:VOL_EVENT.EVENT_START_DATE > = getdate()

Active Events

Description:

Where Equivalent:VOL_EVENT.EVENT_STATUS_CODE = 'ACTIVE'

Hierarchies List

Volunteer Geographical

Volunteer Interest

Event Geographical

Job Geographical

Volunteer Skill

Hierarchies

Volunteer Geographical

Primary Address/Country Code

Primary Address/State

Primary Address/City

Primary Address/Postal code

Volunteer Interest

Volunteer Interests/Interest Category Code

Volunteer Interests/Interest Category Subcode

Event Geographical

Event Info/Event Country Code

Event Info/Event State Code

Event Info/Event City

Job Geographical

Event Job Info/Job Country Code


Event Job Info/Job State Code


Event Job Info/Job City


Volunteer Skill

Volunteer Skills/Skill Code

Volunteer Skills/Skill Level Code

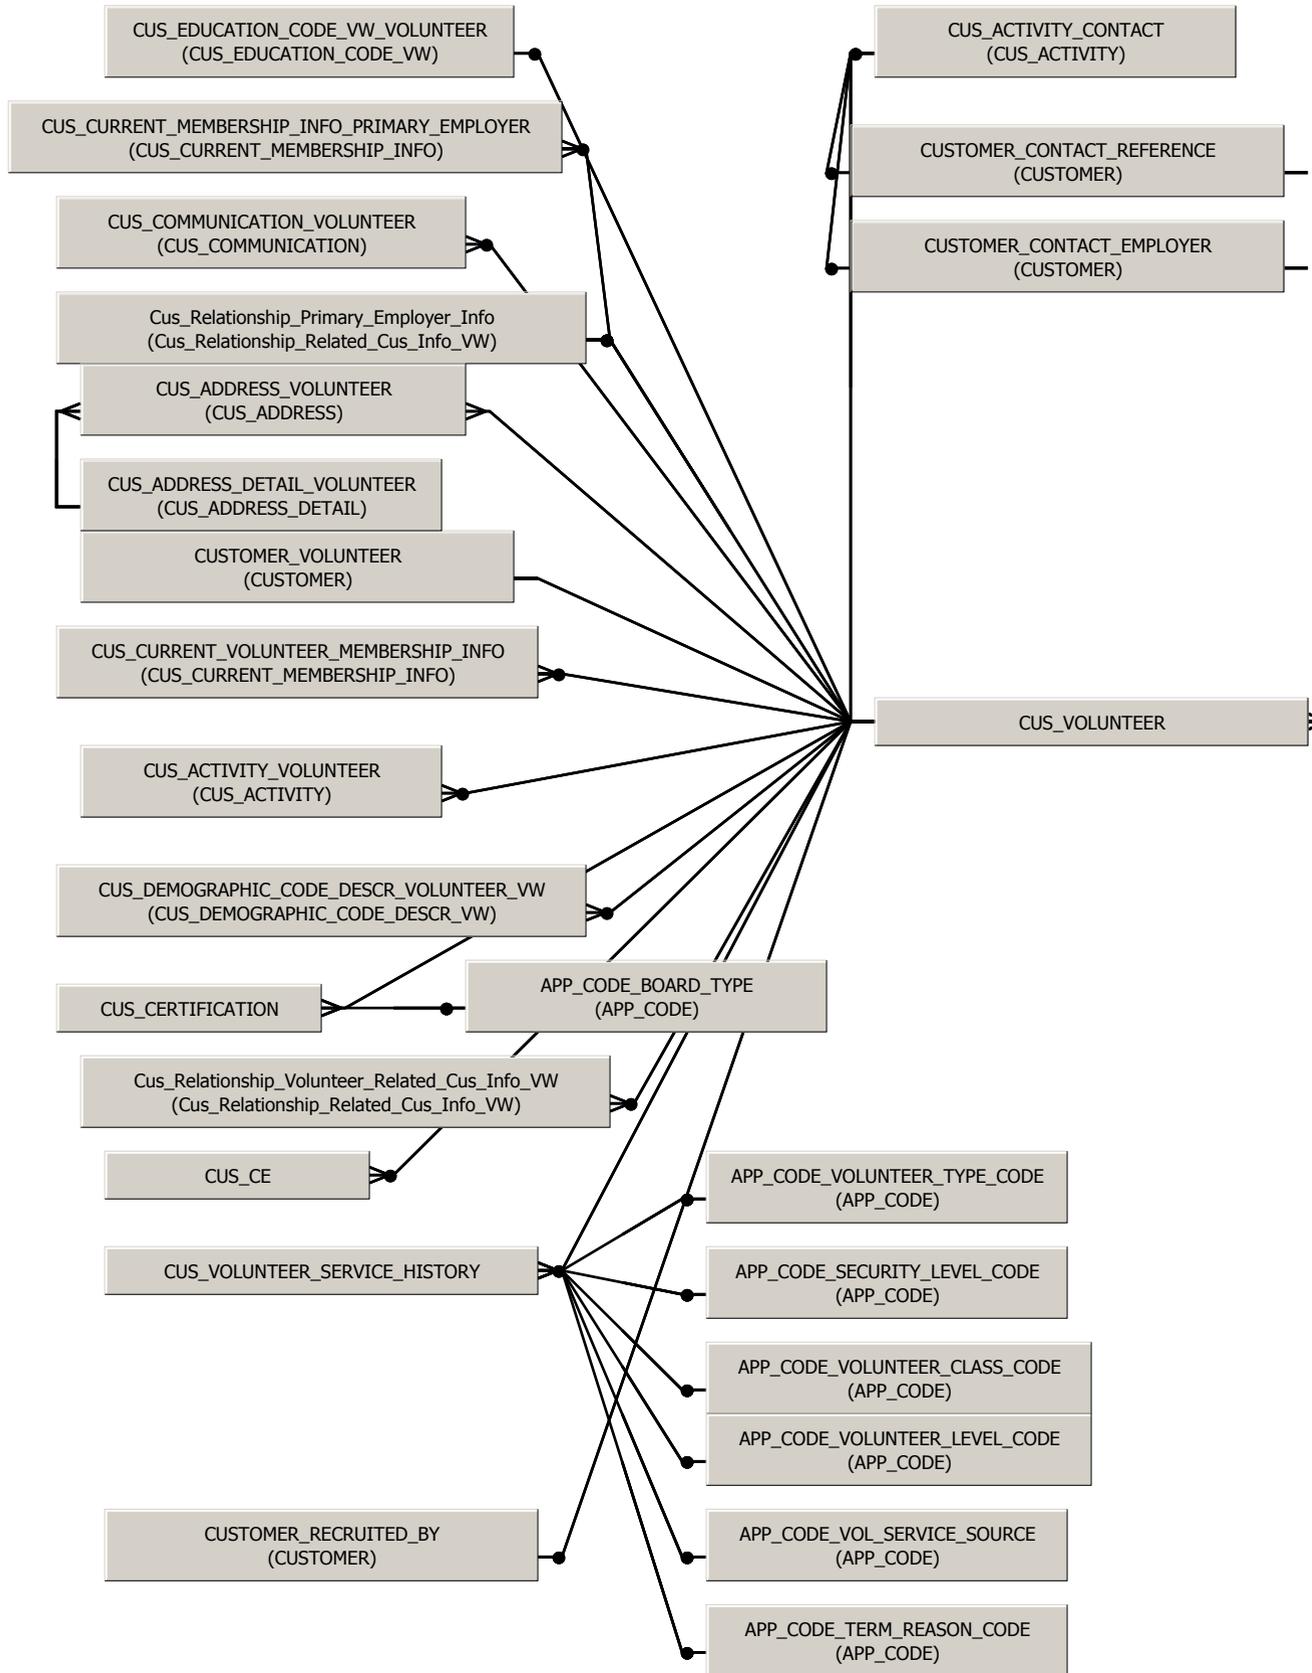

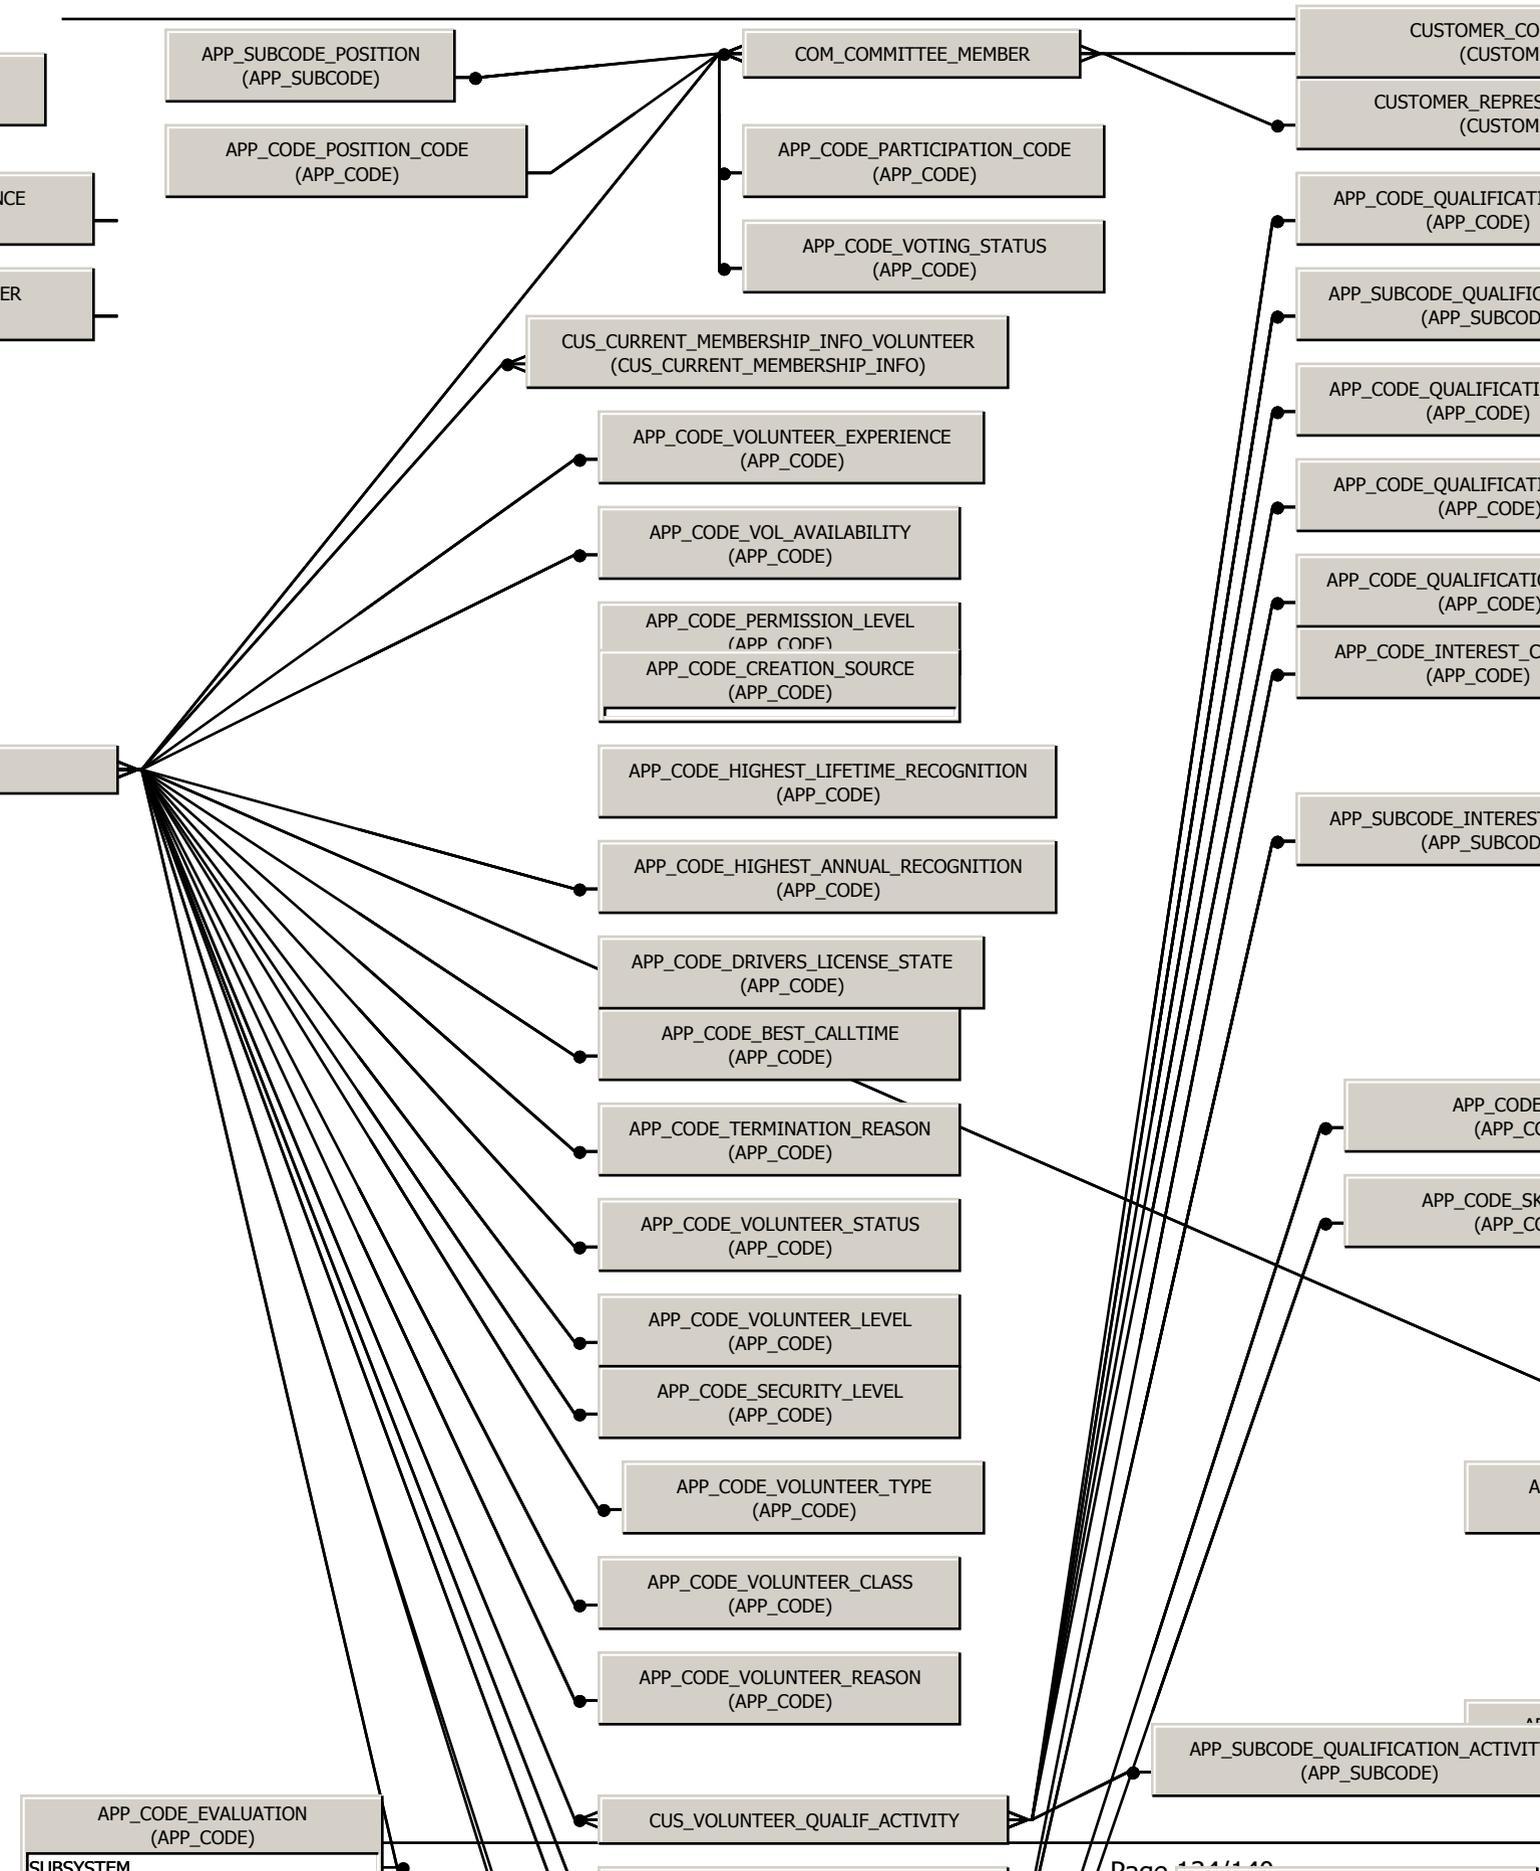

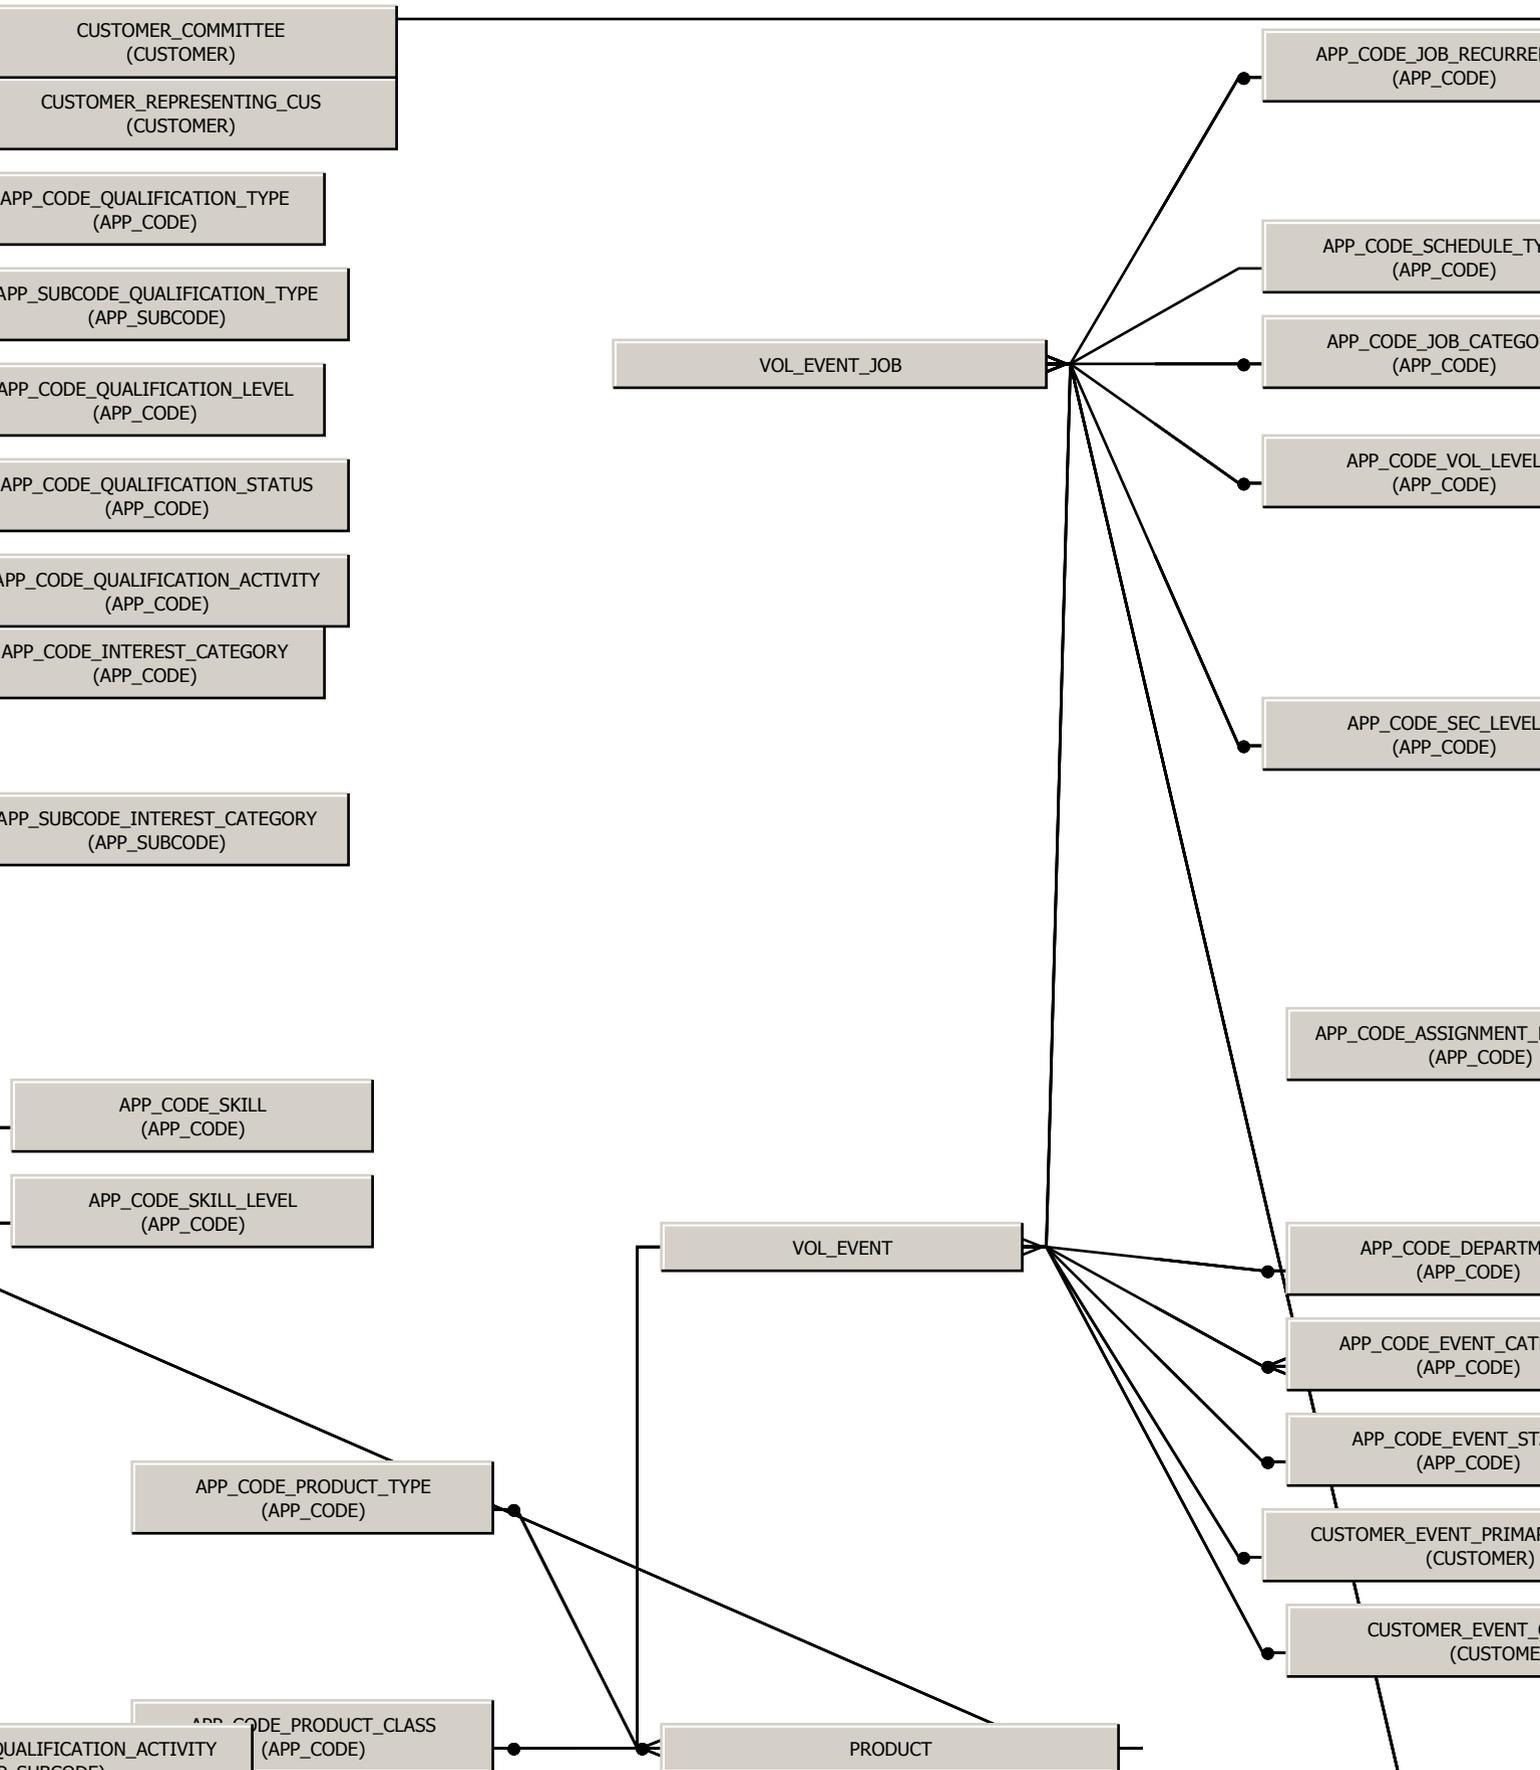

APP_CODE_JOB_RECURRENCE
(APP_CODE)

APP_CODE_SCHEDULE_TYPE
(APP_CODE)

APP_CODE_JOB_CATEGORY
(APP_CODE)

APP_CODE_VOL_LEVEL
(APP_CODE)

APP_CODE_SEC_LEVEL
(APP_CODE)

APP_CODE_ASSIGNMENT_PERMISSION
(APP_CODE)

APP_CODE_DEPARTMENT
(APP_CODE)

APP_CODE_EVENT_CATEGORY
(APP_CODE)

APP_CODE_EVENT_STATUS
(APP_CODE)

CUSTOMER_EVENT_PRIMARY_CONTACT
(CUSTOMER)

CUSTOMER_EVENT_COMMITTEE
(CUSTOMER)

SUBSYSTEM
TYPE
CODE
DESCR
SYSTEM_FLAG
DISPLAY_ORDER
SCREEN_RESTRICTIO
PRIMARY_SUBCODE_...

CUS_EDUCATION_CODE_VW

CUSTOMER

CUS_ACTIVITY

CUS_ADDRESS

JS_CURRENT_MEMBER

CUS_DEMOGRAPHIC_CODE_DESCR_VW

Cus_Relationship_Related_Cus_Info_VW

APP_SUBCODE

C

APP_CODE

CUS_COMMUNICATION

